


# INSTRUCTION BOOK

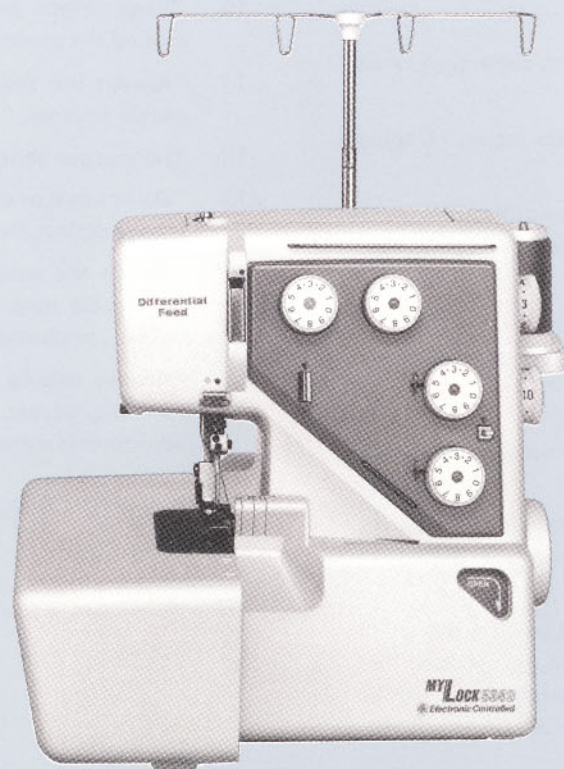

**MY/LOCK 534**

**MY/LOCK 534D**

# “IMPORTANT SAFETY INSTRUCTIONS”

“Your sewing machine is designed and constructed only for HOUSEHOLD use.”

“Read all instruction before using this sewing machine.”

## “DANGER—To reduce the risk of electric shock:”

1. “An appliance should never be left unattended when plugged in. Always unplug this appliance from the electric outlet immediately after using and before cleaning.”
2. “Always unplug before relamping. Replace bulb with same type rated 15 Watts.”
3. “Do not reach for the appliance that has fallen into water. Unplug immediately.”
4. “Do not place or store appliance where it can fall or be pulled into a tub or sink. Do not place in or drop into water or other liquid.”

## “WARNING—To reduce the risk of burns, fire, electric shock, or injury to persons:”

1. “Do not allow to be used as a toy. Close attention is necessary when this appliance is used by or near children.”
2. “Use this appliance only for its intended use as described in this manual. Use only attachments recommended by the manufacturer as contained in this manual.”
3. “Never operate this appliance if it has a damaged cord or plug, if it is not working properly, if it has been dropped or damaged, or dropped into water. Return the appliance to the nearest authorized dealer or service center for examination, repair, electrical or mechanical adjustment.”

4. “Never operate the appliance with any air opening blocked. Keep ventilation openings of the sewing machine and foot controller free from accumulation of lint, dust, and loose cloth.”
5. “Never drop or insert any object into any opening.”
6. “Do not use outdoors.”
7. “Do not operate where aerosol (spray) products are being used or where oxygen is being administered.”
8. “To disconnect, turn all controls to the off (“O”) position, then remove plug from outlet.”
9. “Do not unplug by pulling on cord. To unplug, grasp the plug, not the cord.”
10. “Keep fingers away from all moving parts. Special care is required around the sewing machine needle and knives.”
11. “Always use the proper needle plate. The wrong plate can cause the needle to break.”
12. “Do not use bent needles.”
13. “Do not pull or push fabric while stitching. It may deflect the needle causing it to break.”
14. “Switch the sewing machine off (“O”) when making any adjustment in the needle area, such as threading needle, changing needle, threading bobbin, or changing presser foot, and the like.”
15. “Always unplug the sewing machine from the electrical outlet when removing covers, lubricating, or when making any other user servicing adjustments mentioned in the instruction manual.”

## “SAVE THESE INSTRUCTIONS”

## TABLE OF CONTENTS

### PREPARATION

Names of Parts . . . . .	2
Attaching the Waste Chip Box . . . . .	3
Storing the Accessory Box . . . . .	3
Connecting the Machine to the Power Supply . . . . .	4
Controlling Sewing Speed . . . . .	4
How to Turn Balance Wheel . . . . .	5
Opening and Closing the Side Cover . . . . .	5
Opening and Closing the Looper Cover . . . . .	5
The Position of Thread Guide Bar . . . . .	6
Attaching the Thread Stripping Disc and Net . . . . .	6
Raising or Lowering the Presser Foot . . . . .	6
Threading the Machine . . . . .	7
• Threading the Lower Looper . . . . .	8~9
• Threading the Upper Looper . . . . .	10~11
• Threading the Needle on the Right . . . . .	12~13
• Threading the Needle on the Left . . . . .	14~15

### TEST STITCHING

Starting Sewing . . . . .	16
Finishing Sewing . . . . .	16
Sewing Continuously . . . . .	16
How to Use Guide Lines . . . . .	16
Securing Ends . . . . .	17
Thread Tension (4 threads) . . . . .	18~19
Adjustment of Cutting Width . . . . .	20
Thread and Needle Chart . . . . .	21
Threading the Machine (3 threads) . . . . .	22
Thread Tension (3 threads) . . . . .	23
Adjustment of Stitch Length . . . . .	24
Adjustment of Differential Feed Ratio (model 534D) . . . . .	24
Changing Needle . . . . .	25
Adjustment of Foot Pressure . . . . .	25

Removing the Presser Foot . . . . .	26
Attaching the Presser Foot . . . . .	26
To Deactivate the Upper Knife . . . . .	26
To Activate the Upper Knife . . . . .	26
Adjustment of Needle Plate Setting Knob . . . . .	27

### ROLLED HEMMING, PICOT EDGING AND NARROW HEMMING

Machine Setting . . . . .	28
Thread, Fabric and Range of the Tension Dial . . . . .	29
Adjusting Thread Tension . . . . .	30
How to Adjust the Thread Tension . . . . .	30

### DECORATIVE OVEREDGING

Thread, Fabric, Range of the Tension and Machine Setting . . . . .	31
--	----

### GATHERING

Thread, Fabric, Range of the Tension and Machine Setting . . . . .	31
--	----

### PIN TUCKING



Fabric, Thread and Machine Setting . . . . .	32
Sewing . . . . .	32

### CARE OF YOUR MACHINE


Replacing the Upper Knife . . . . .	33
Cleaning Upper Knife Area . . . . .	33
Replacing the Light Bulb . . . . .	34
Cleaning the Feed Dog . . . . .	34
Oiling the Machine . . . . .	35
Carry the Machine . . . . .	35
Trouble Shooting . . . . .	36

## PREPARATION

### Names of Parts

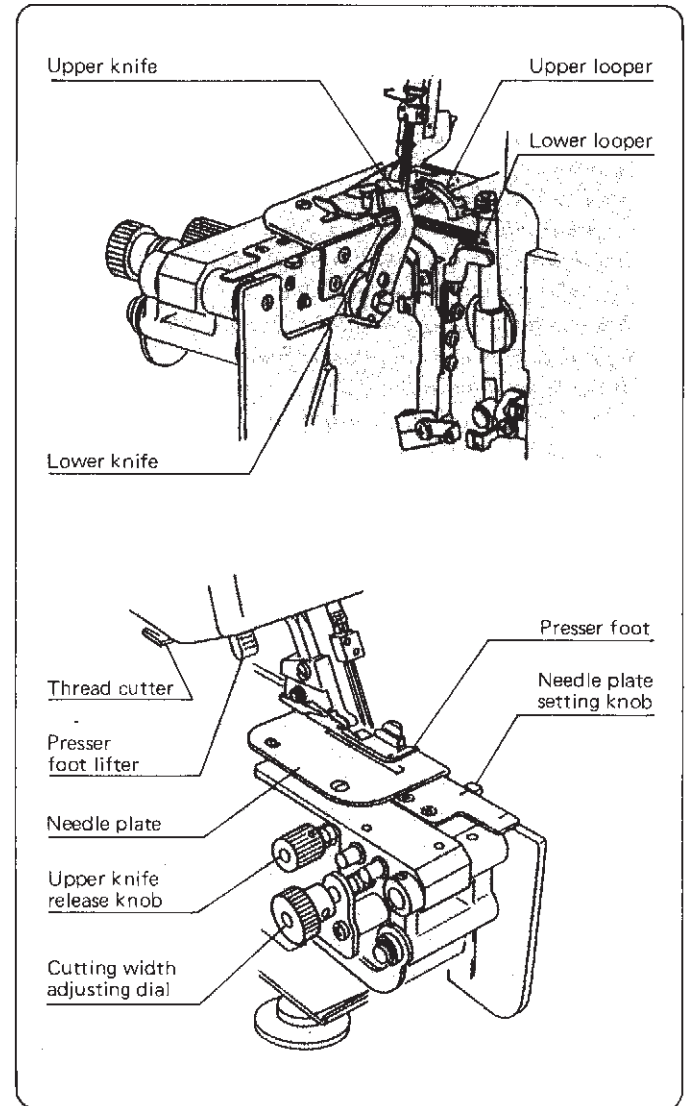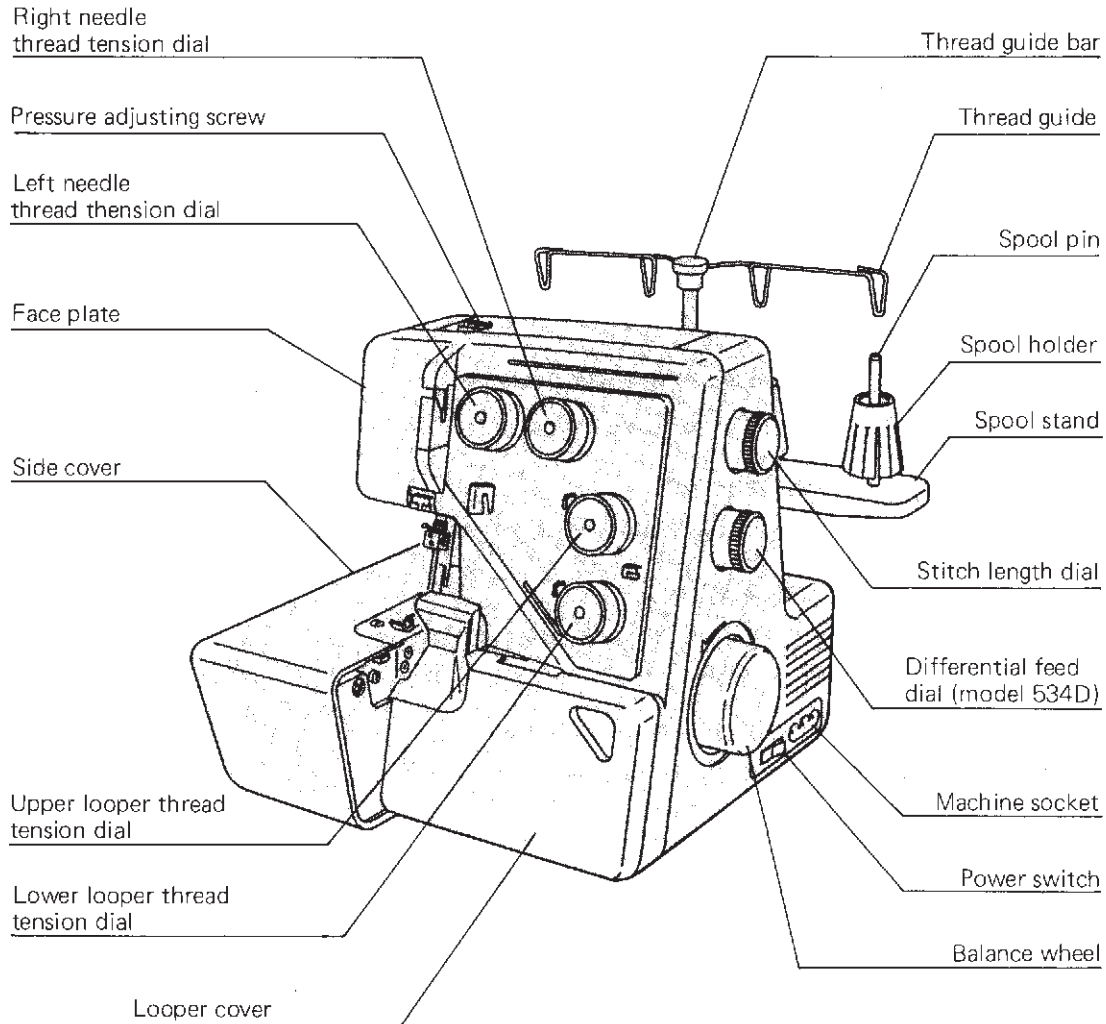


### Attaching the Waste Chip Box

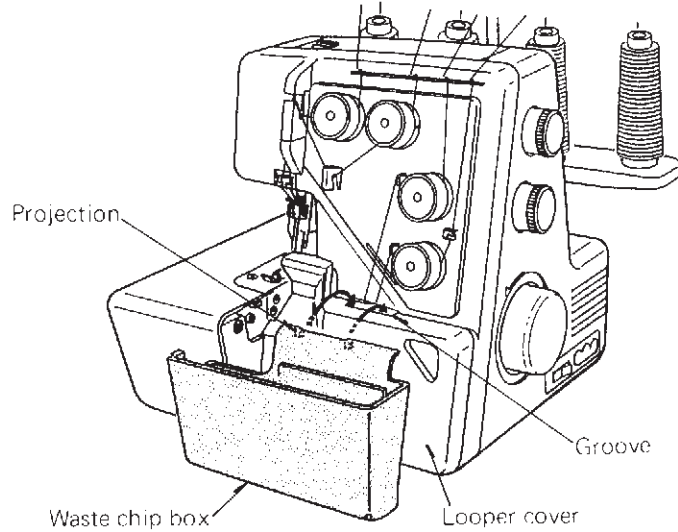


Insert the projection into groove on looper cover.

### Storing the Accessory Box

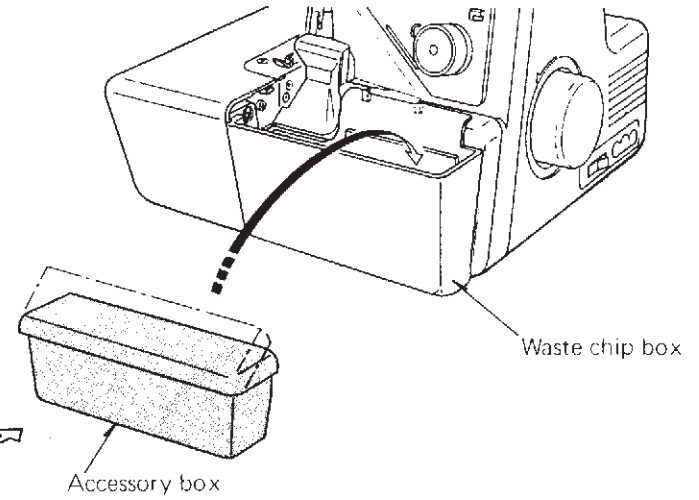

Insert the accessory box into the waste chip box.

### Standard Accessories

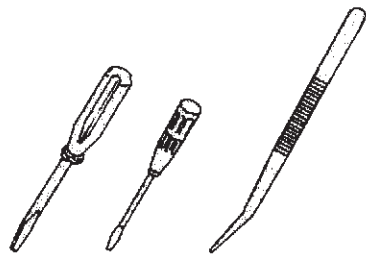

Screwdrivers


Tweezers



Needles



Set of needles



Thread stripping discs



Spanner



Looper threader



Lint brush



Oil




Upper knife




Needle threader

## Connecting the Machine to the Power Supply

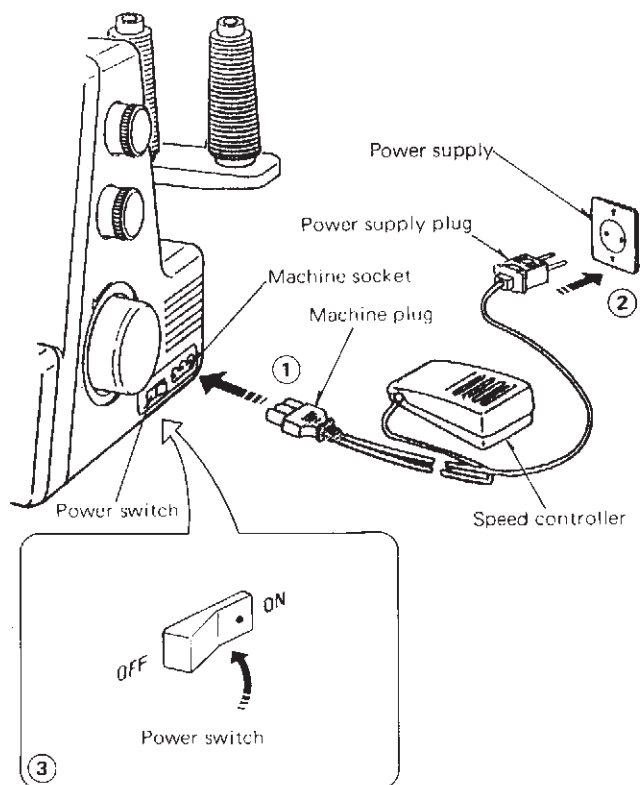

- ① Turn off the power switch, and connect the machine plug to the machine socket.
- ② Connect the power supply plug to your power supply.
- ③ Turn on the power switch.

## Controlling Sewing Speed

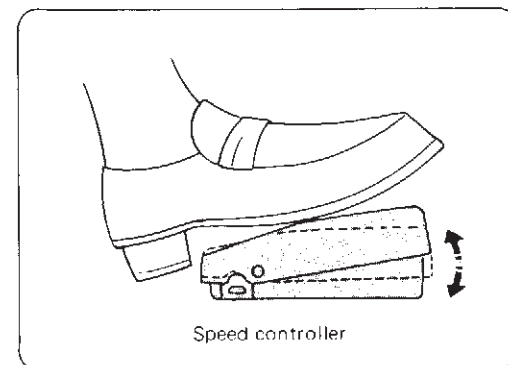


Sewing speed can be varied by the speed controller. The harder you press on the controller, the faster the machine runs.

Step on speed controller with presser foot lifter up, and practice controlling the speed.

### For Your Safety:


- \* While in operation, always keep your eye on the sewing area, and do not touch any moving parts such as the thread take-up lever, balance wheel, needle or knives.
- \* Always disconnect the machine from the power supply:
  - When leaving the machine unattended.
  - When attaching or removing parts.
  - When threading or cleaning the machine.
- \* Do not place anything on the speed controller, except in use.

### How to Turn Balance Wheel

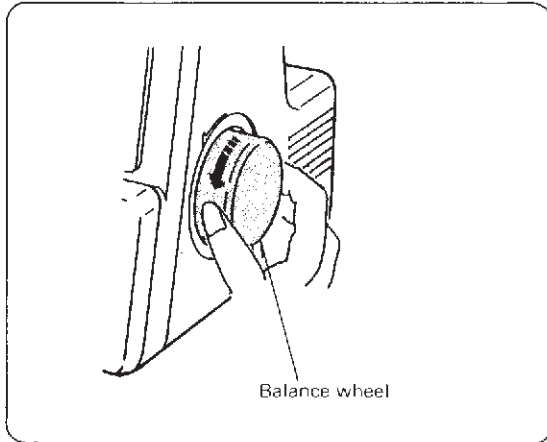

Always turn balance wheel toward you (Counter-clockwise).

### Opening and Closing the Side Cover

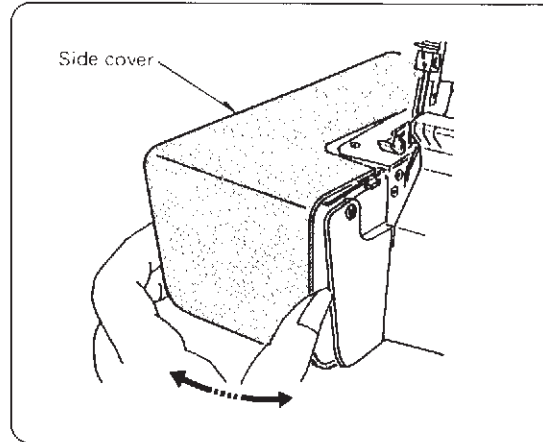


To open:

Push the side cover to the left.

To close:

Push the side cover to the right and slightly toward the machine body.

### Opening and Closing the Loooper Cover

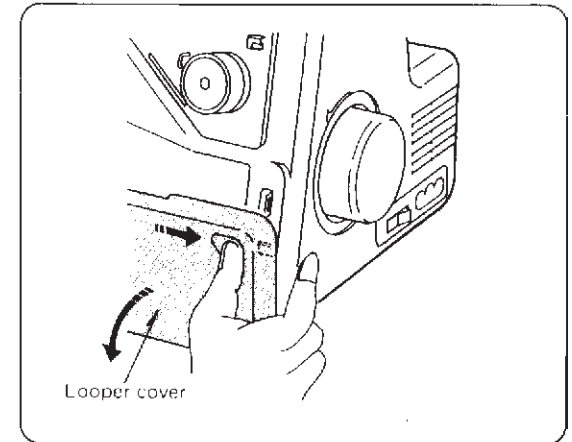

To open:

While pushing with the thumb to the right as far as it will go, pull looper cover toward you.

To close:


Lift looper cover and push against the machine. The looper cover snaps into the position automatically.

### For Your Safety:

Always close the both side and looper covers when the machine is in use.




## The Position of Thread Guide Bar

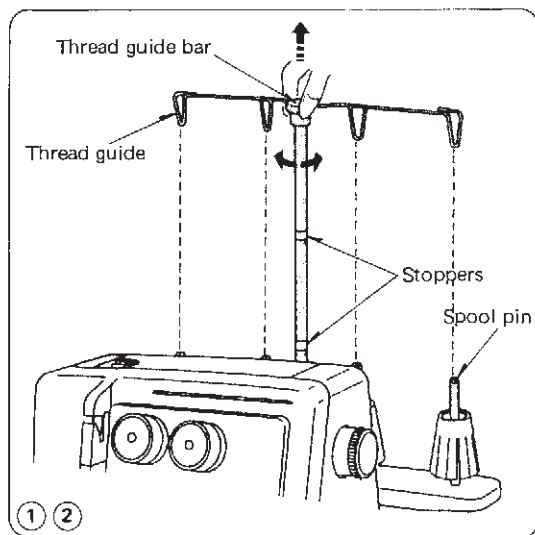


- ① Pull the thread guide bar up as far as it will go.
- ② Turn the thread guide bar so that the thread guides are right above the spool pins.


## Attaching the Thread Stripping Disc and Net

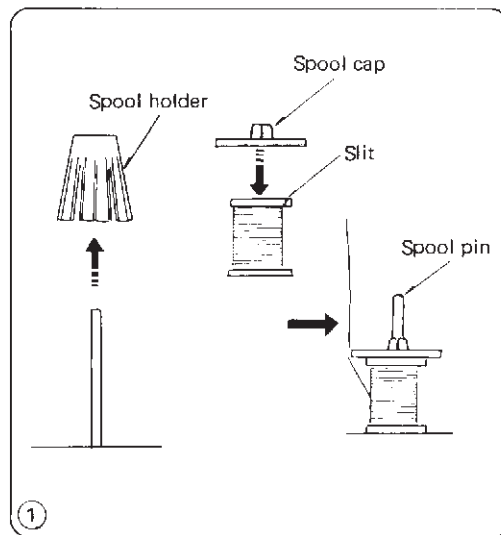

- ① When you use a small thread spool, pull out the spool holder from the spool pin. Then place the spool with its slit side up, and put the thread stripping disc on top.
- ② If the thread would slip down from the spool during threading and/or sewing, or it would slip off from the tension dial discs in rolled hemming, put the net supplied with the machine on the spool as illustrated for preventing jamming.

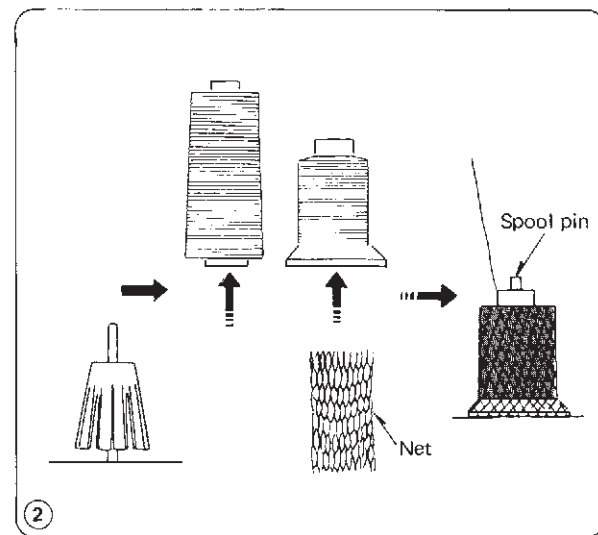

## Raising or Lowering the Presser Foot

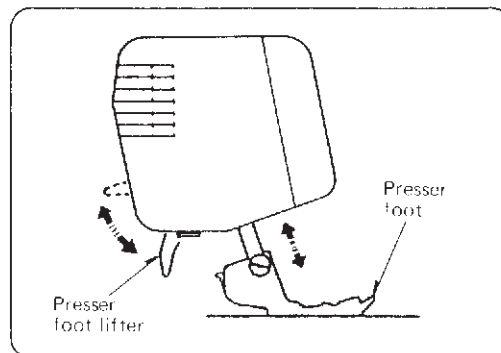


By raising or lowering the presser foot lifter, the presser foot goes up and down.




\* While in operation, keep the presser foot lowered except for testing stitches, threading the machine or sewing heavy weight fabrics.



## Threading the Machine

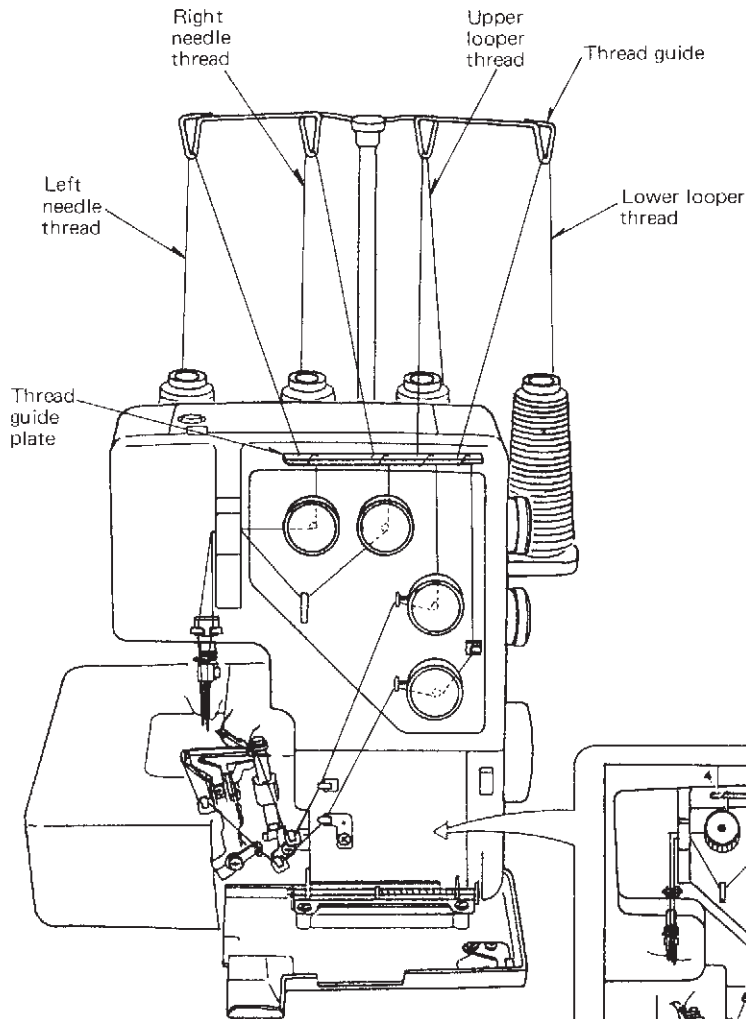

Threading Chart

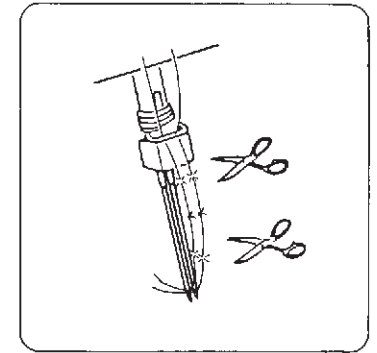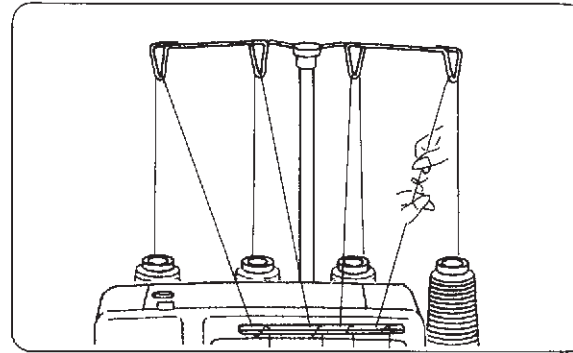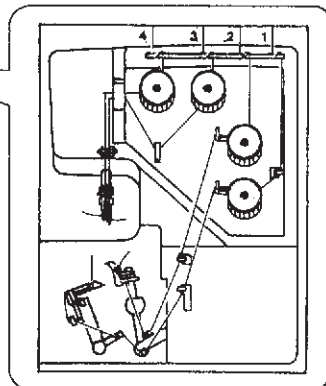

The machine has been threaded and ends of threads have been cut at the factory. To thread the machine knot one end of thread, then raise the presser foot and pull the other end of thread. For needle threads, pull the other ends of threads until the knots come to needle eyes, and cut the threads at the both sides of the knots. Then thread the needle eye with the needle threader. (Refer to page 13.)



This way you can save time threading.

Thread lower looper first, then upper looper, needle on the right and needle on the left if the machine is unthreaded. A convenient threading chart is placed on the machine body inside the looper cover.


Incorrect threading will cause skipped stitches, broken thread or uneven thread tension. Before starting to sew, make sure that your machine is threaded properly.

- \* When you change the threads, cut the threads between the thread guide and the thread guide plate. The proceed the threading in the above mentioned method.
- \* For easy threading, first set the thread tension dial at "0" and threading the machine. After threading, set the thread tension dial at suitable number (refer to the pages 18, 19, 23 and 29 to 32.)


● **Threading the Lower Looper**

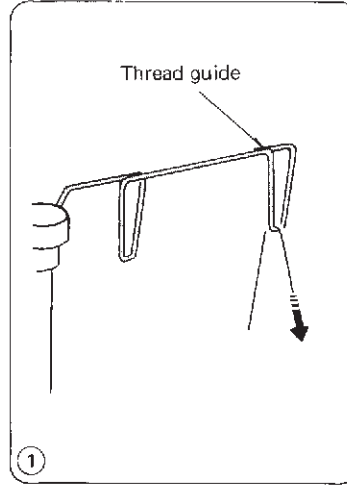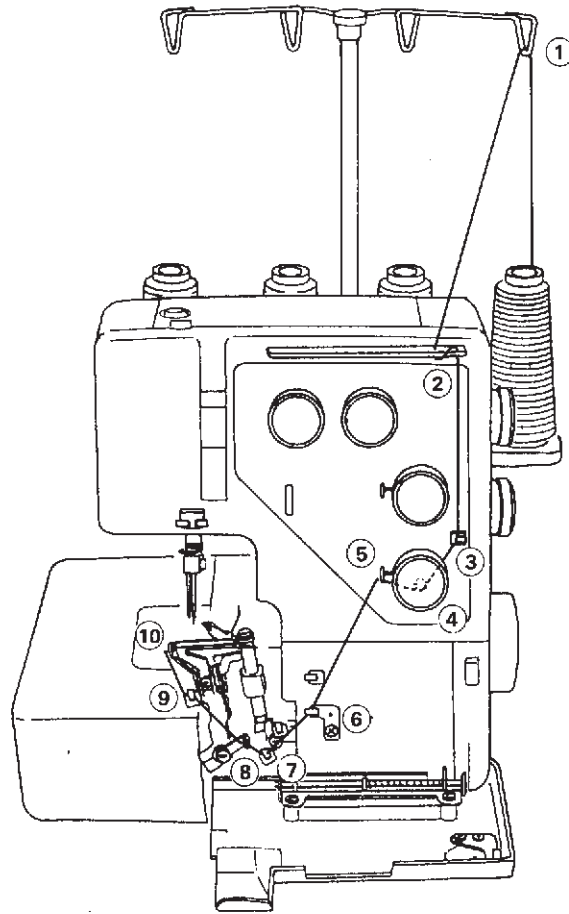

① Draw the thread through the right side thread guide from back to front.

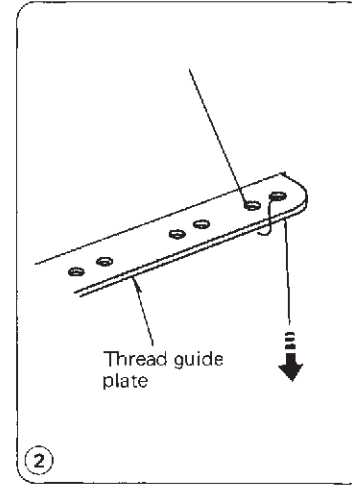


② Pass the thread through holes on the right side of thread guide plate as illustrated.

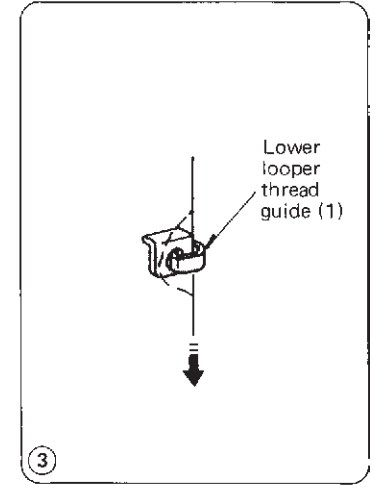

③ Pass the thread through the thread guide (1).

**How to Thread the Lower Looper**



Cut the both needle threads as shown in the figure and remove them from the needles.


Thread the lower looper and then re-thread the needles.

Open the looper and side covers.


Place the spool of thread on the right side spool pin.

\* The points to thread for lower looper are marked in green.


\* A convenient threading chart is placed on the machine body inside the looper cover.

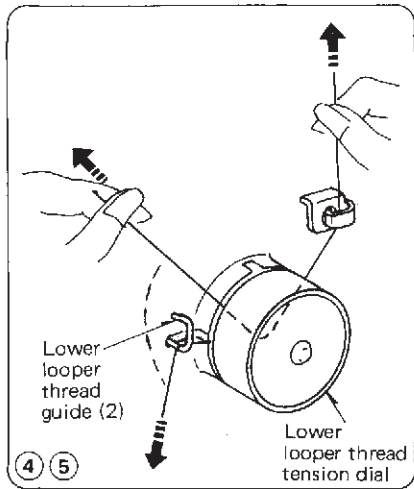


- ④ Insert the thread between tension discs from the right. Then pull both sides of the thread firmly between tension discs.
- ⑤ Pass the thread through lower looper thread guide (2).

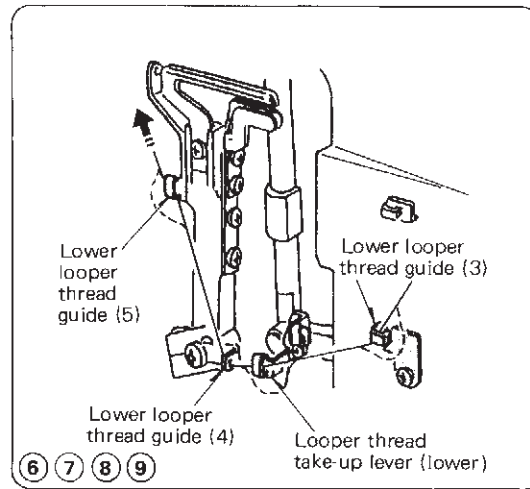


- ⑥ Pass the thread through the thread guide (3).
- ⑦ Pass the thread through the looper thread take-up lever (lower).
- ⑧ Pass the thread through the thread guide (4).
- ⑨ Pass the thread through the thread guide (5).

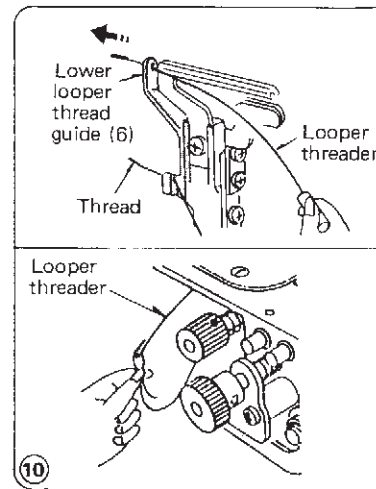

- ⑩ Turn the balance wheel toward you until the lower looper comes to the right, and pass the threader through hole on lower looper thread guide (6). Then hook the end of thread on the threader.

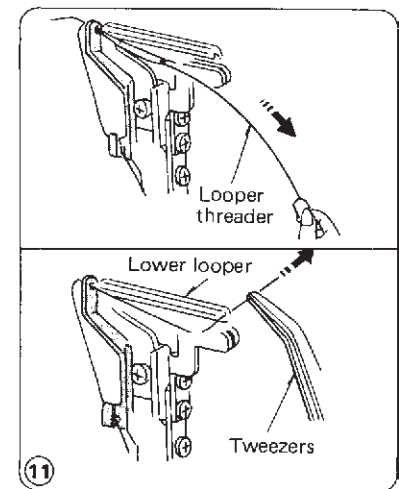


- ⑪ Pull the threader to pass the thread through the hole of lower looper thread guide (6). Remove the thread from the threader, and draw the thread with a pair of tweezers through the hole on lower looper 10 cm (4") or more. Close the side cover.




\* Make sure that the thread is between the tension discs.

### How to Thread Woolly Nylon/Polyester Thread

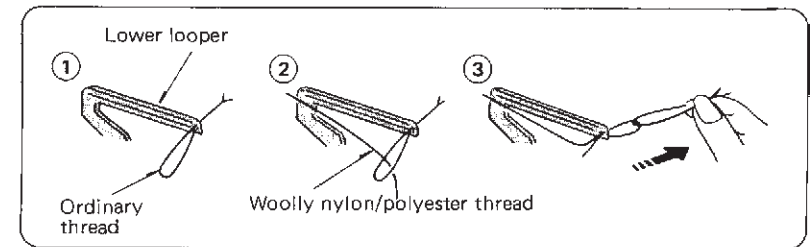

- \* To pass the woolly nylon/polyester thread shown above is one of the easiest ways to do so.
- \* Use the same method for the upper looper.


● Threading the Upper Looper

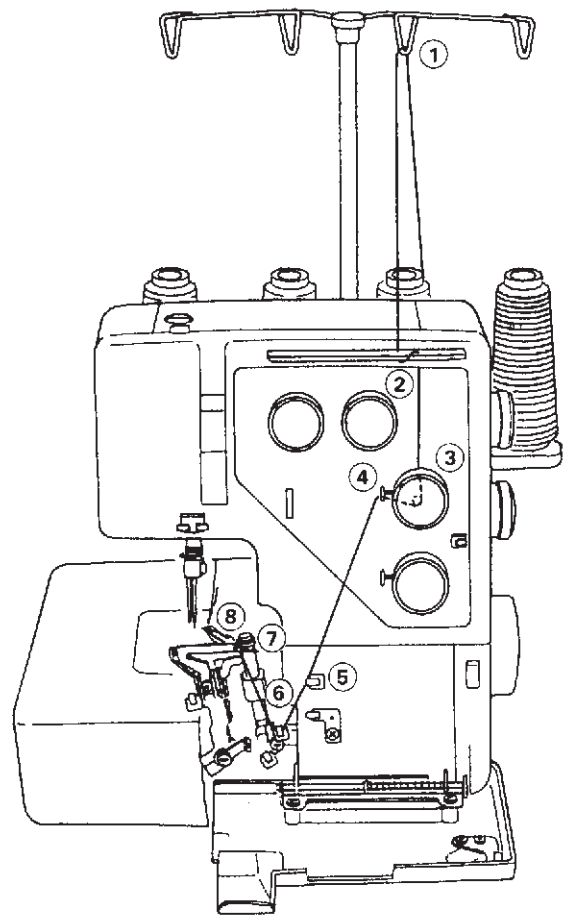


Place the spool of thread on the spool pin second from the right.

\* The points to thread for upper looper are marked in red.


\* A convenient threading chart is placed on the machine body inside the looper cover.

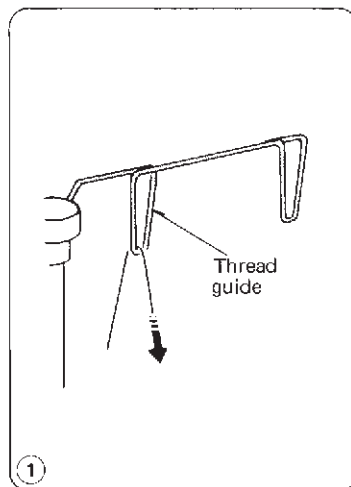

① Draw the thread through the thread guide second from the right from back to front.

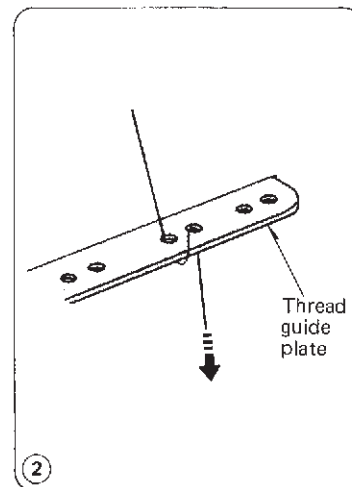


② Pass the thread through the holes in the second row from the right of thread guide plate as illustrated.

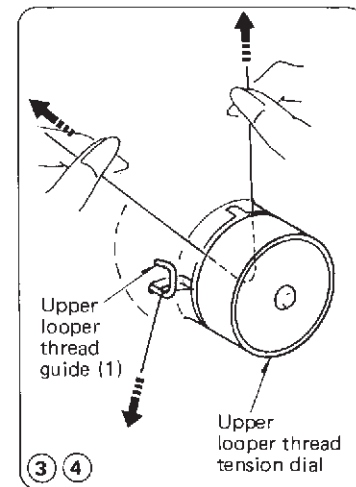


③ Insert the thread between tension discs from the right. Then pull both sides of thread.  
④ Pass the thread through upper looper thread guide (1).

How to Thread the Upper Looper

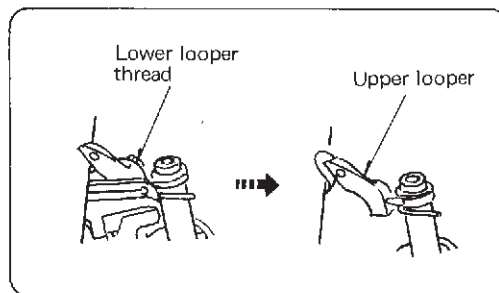


Turn the hand wheel toward you until the upper looper comes to the middle point of its travel, and unhook the thread of the lower looper from the upper looper.

Thread the upper looper.

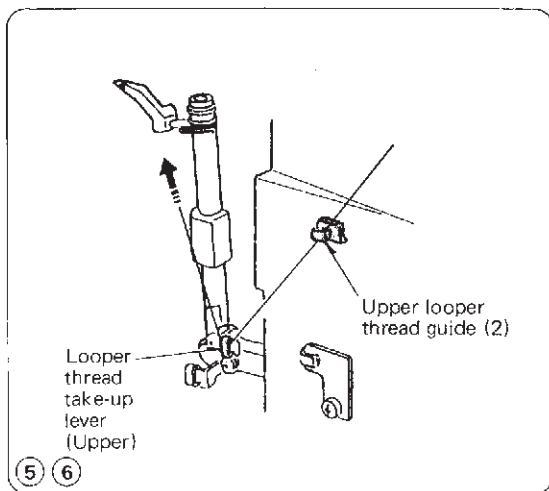


- ⑤ Pass the thread through upper looper thread guide (2).
- ⑥ Pass the thread through the looper thread take-up lever (Upper).

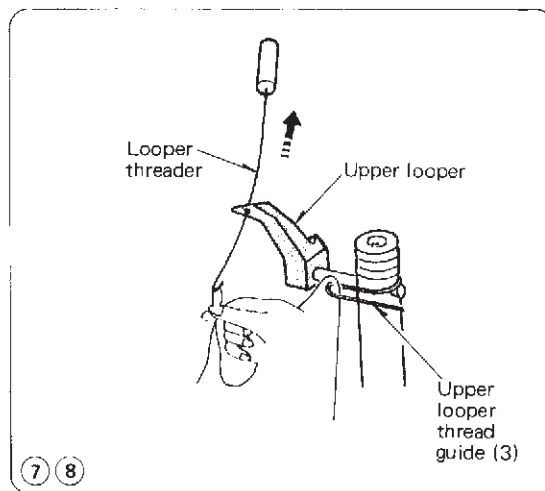


- ⑦ Pass the thread through upper looper thread guide (3).
- ⑧ Pass the threader through the hole on the upper looper. Then hook the end of thread on the threader. Pull out the threader to pass the thread through the hole. Remove the thread from threader, and draw the free end of thread 10 cm (4") or more.

● Threading the Needle on the Right

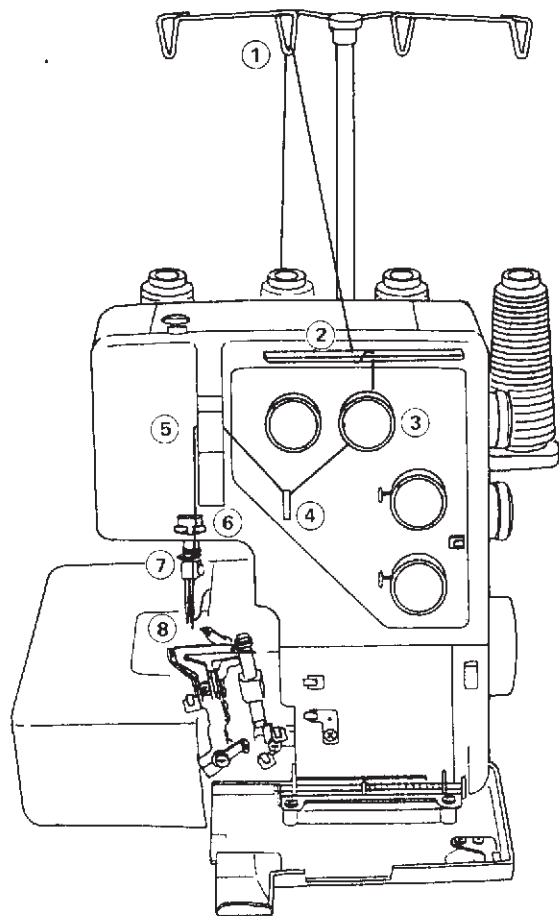


Place the spool of thread on the spool pin second from the left.


- \* The points to thread for needle on the right are marked in blue.
- \* A convenient threading chart is placed on the machine body inside the looper cover.

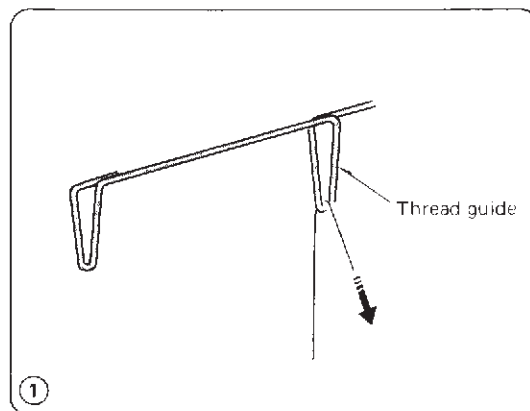


① Draw the thread through the thread guide second from the left from back to front.

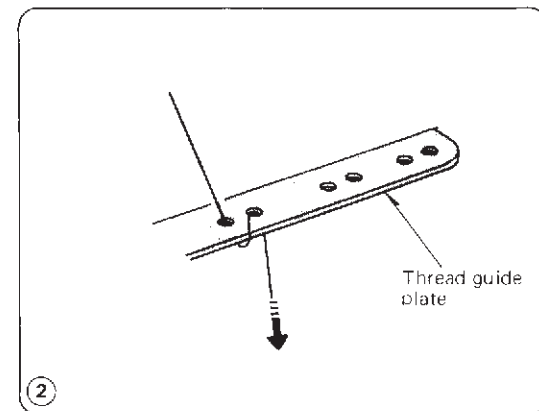


② Pass the thread through the holes in the second row from the left of thread guide plate as illustrated.

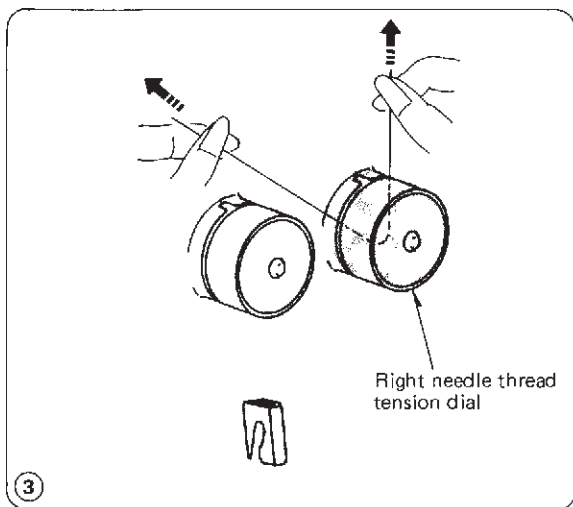

③ Insert the thread between tension discs from the right. Then pull both sides of thread.

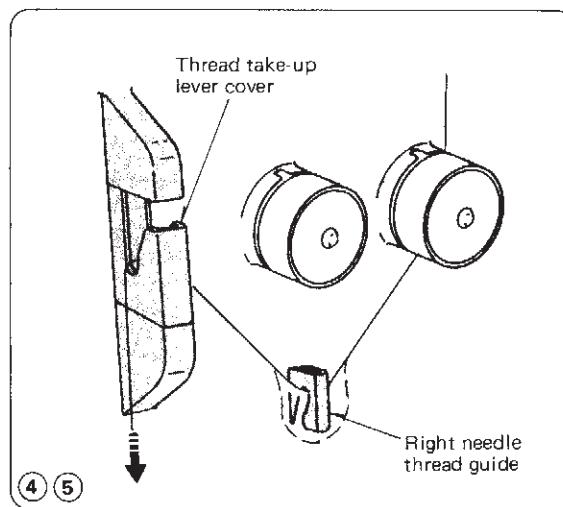

④ ⑤ Turn the hand wheel toward you to bring needle bar to its highest position, then pass the thread through right needle thread guide and thread take-up lever cover.

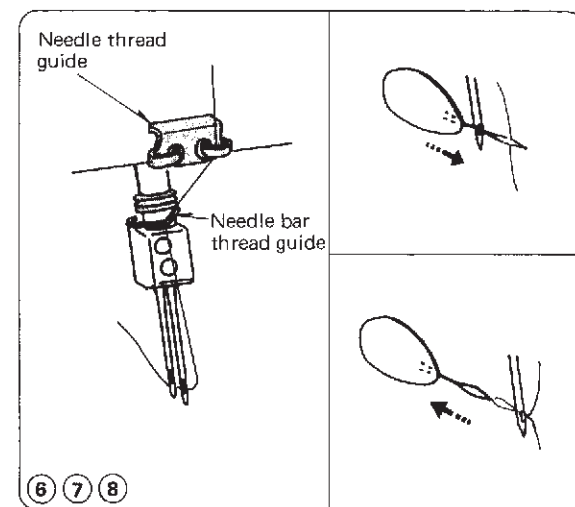



⑥ Pass the thread through needle thread guide sliding the thread from left to right.

⑦ Pass through needle bar thread guide from left to right.


⑧ Pass the threader through the needle eye from back to front.  
Pass the end of thread through the loop of threader, then pull the threader to the back to pass the thread through needle eye. Draw the free end of thread 10 cm (4") or more.



● Threading the Needle on the Left

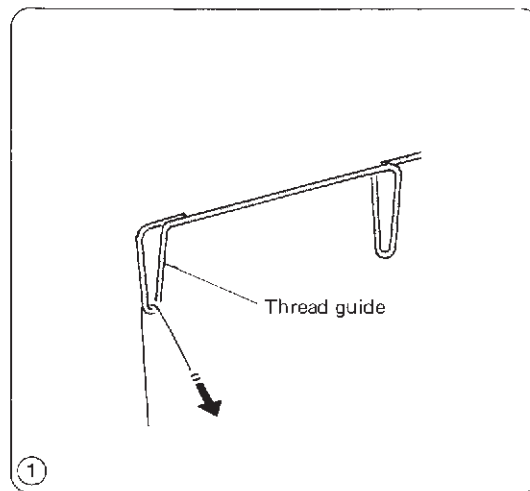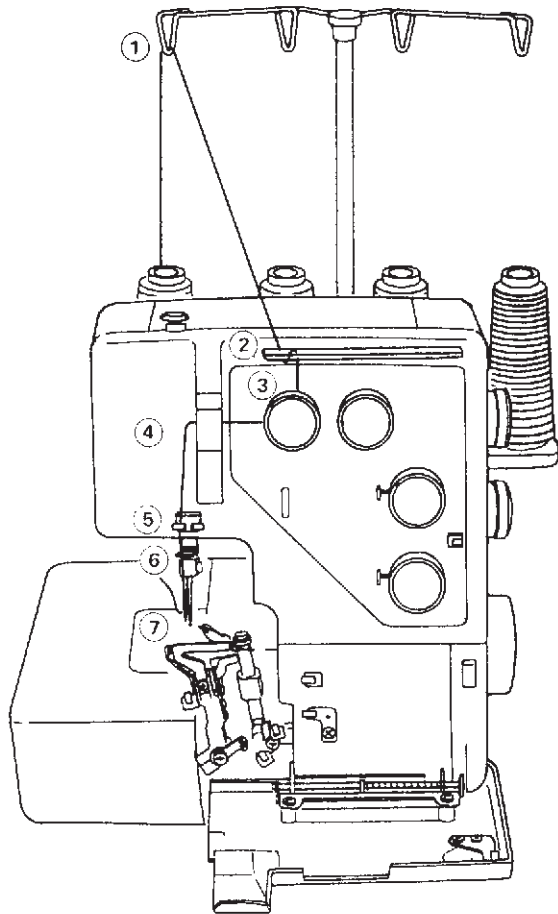


① Draw the thread through the thread guide on the left from back to front.

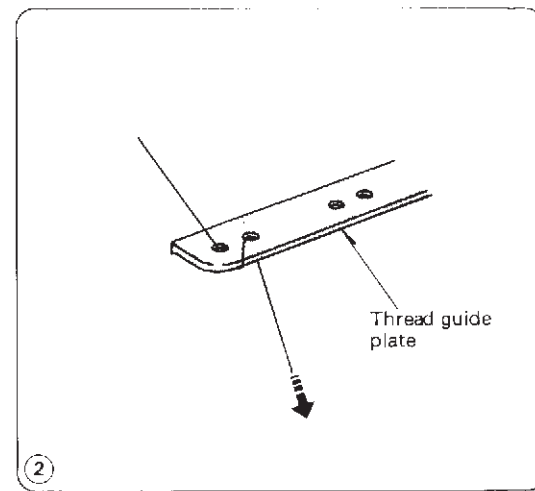


② Pass the thread through the holes on the left of thread guide plate as illustrated.

Place the spool of thread on the left side spool pin.

- \* The points to thread for needle on the left are marked in orange.
- \* A convenient threading chart is placed on the machine body inside the looper cover.

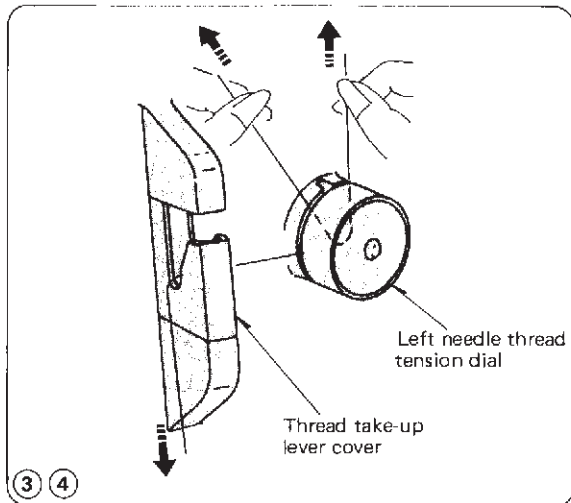


- ③ Insert the thread between tension discs from the right. Then pull both sides of thread.
- ④ Turn the hand wheel toward you to bring needle bar to its highest position, then pass the thread through thread take-up lever cover.

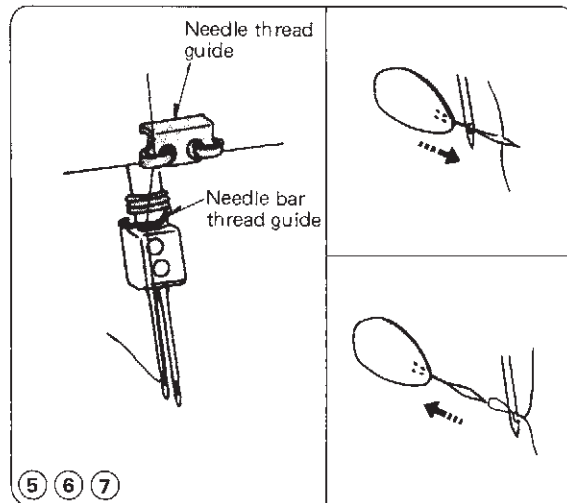

- ⑤ Pass the thread through needle thread guide sliding the thread from right to left.
- ⑥ Pass through needle bar thread guide from left to right.
- ⑦ Pass the threader through the needle eye from back to front.  
Pass the end of thread through the loop of threader, then pull the threader to the back to pass the thread through needle eye. Draw the free end of thread 10 cm (4") or more.  
Close the looper covers.


## TEST STITCHING

### Starting Sewing

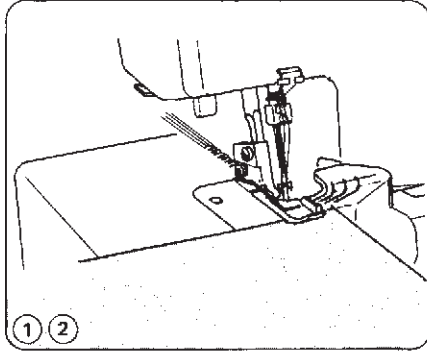


- ① Insert the fabric under the toe of the foot.  
(It is not necessary to raise the foot.)
- ② Turn the balance wheel gently toward you a couple of turns and check the thread chain. Then start sewing slowly. The fabric will be automatically fed. Guide the fabric in the direction desired.

### Finishing Sewing

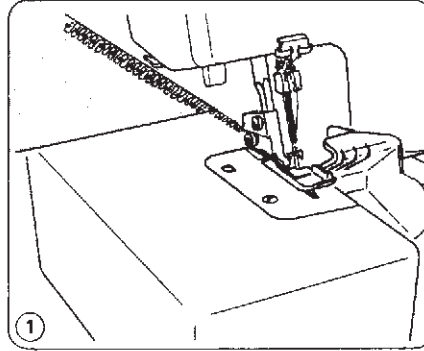


- ① When stitching is completed, continue to run the machine slowly to produce a thread chain for about 12 cm (5") while pulling the thread chain slightly to the back.

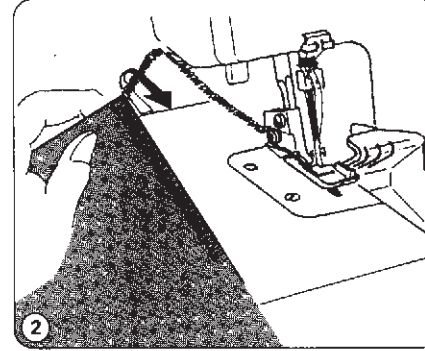

- ② Cut the threads with the thread cutter as illustrated, leaving about 5 cm (2") thread chain from the end of fabric.


### Sewing Continuously

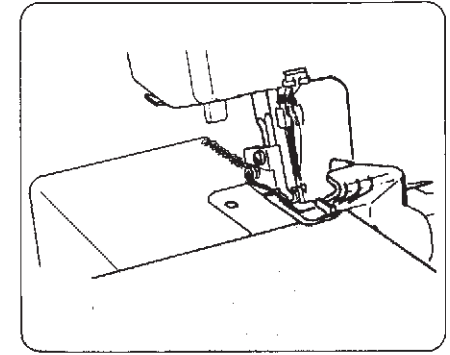

Insert next fabric under the toe of foot, then start sewing. It is not necessary to raise the presser foot for ordinary fabric.

- \* For heavy weight fabric, raise the presser foot and insert the fabric in front of the knife. Then lower the foot and sew.

### How to use Guide Lines

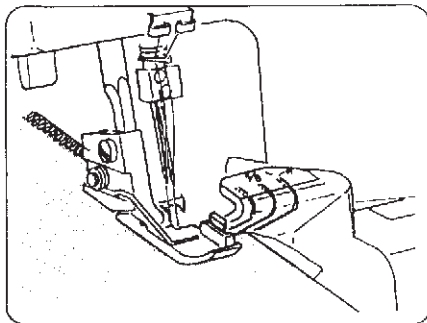

On the top of the looper cover are guide lines indicating the distance from the needle position. Please use as sewing guides.





Mark L indicates the distance from left needle.

Mark R indicates the distance from right needle.


Distance between center of guide line and needle position is 5/8 inch.

## Securing Ends

To avoid unravelling, it is necessary to leave a thread chain about 5 cm (2") long at the beginning and end of seam. To secure the beginning and end of a seam choose one of the following methods.

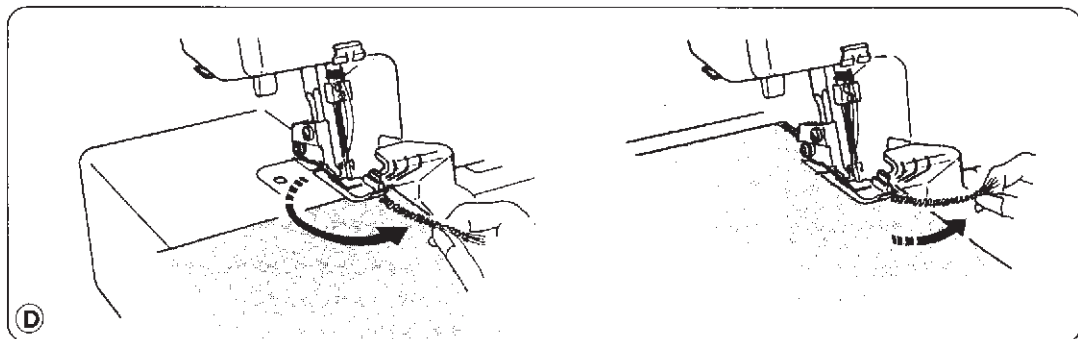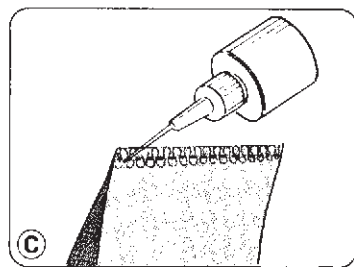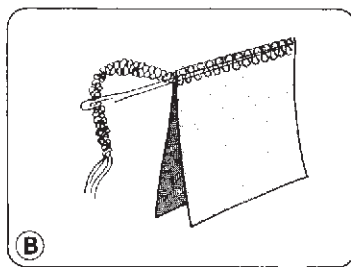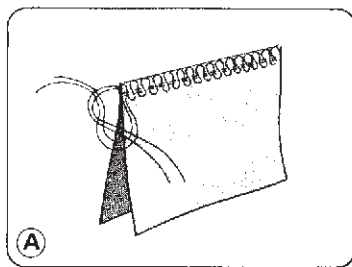

You can use the same methods as **at the beginning** to secure the end of seam except "Backstitching" or the methods shown below.

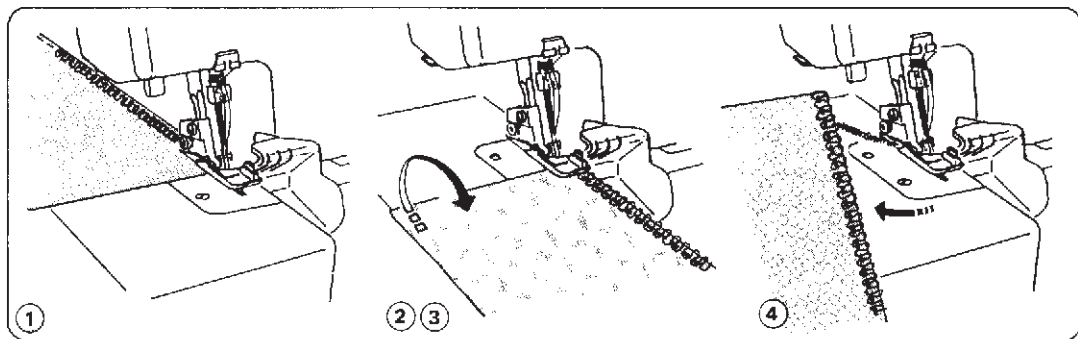

### At the Beginning

- A. Separate the end of threads and knot.
- B. Thread the chain through a large eyed needle, and weave that chain through the overlock stitches on the fabric.
- C. Cut the chain at the edge of fabric. Then apply a small amount of seam sealant (Fray Check™ or Fray-No-More™) on the end of the threads.
- D. Backstitching.


1. Before putting your fabric in the machine, sew a thread chain about 5 cm (2") long behind the needle.
2. Put your fabric in the machine. Then serge a few stitches and stop.
3. Raise the presser foot and bring the thread chain to the left around and under the presser foot.
4. Place the thread chain between the presser foot and upper knife, holding it in position as you lower the presser foot to sew.
5. After sewing about 2.5 cm (1"), move the chain to the right and under the upper knife, cutting the chain as you sew.

- ① Serge one stitch off the end of seam.
- ② Raise the needle and presser foot, and gently pull the threads off the prong.
- ③ Turn the fabric over so that the under side is up.
- ④ Serge about 2.5 cm (1") over stitching and angle off the fabric.


## Thread Tension (4 threads)

Adjusting the thread tension may be required depending on the type of fabric and thread being used.

### Correct Tension

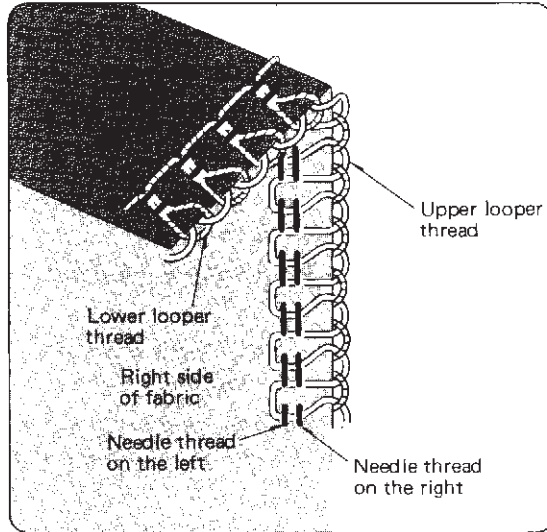


### Thread Tension Dial

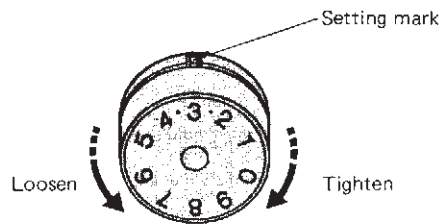


## Thread Tension Adjustment

\* Set all four thread tension dials at "3". Then sew, and check the thread tensions.


### Wrong Tension

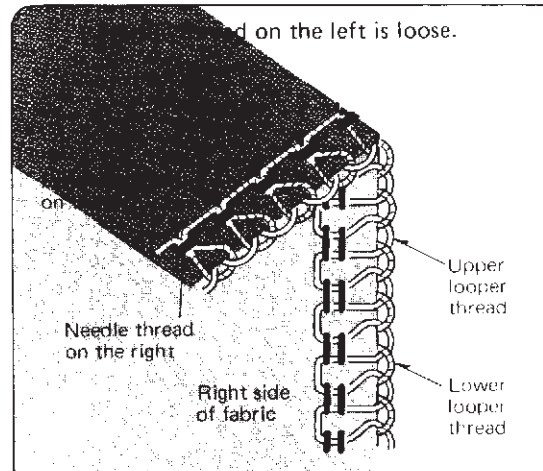


Tighten needle thread tension on the left.

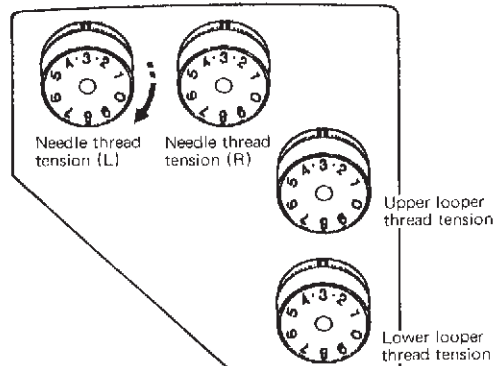

### Wrong Tension

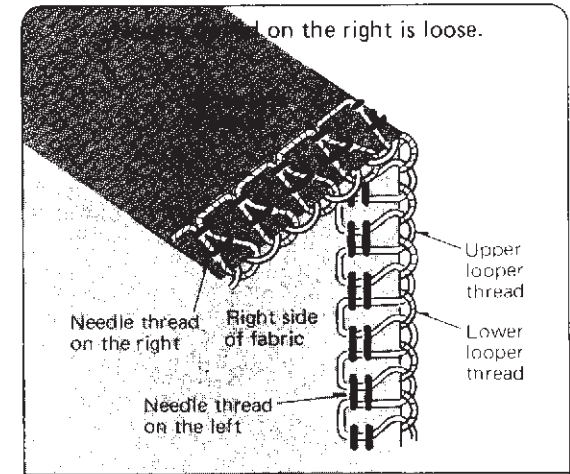


Tighten needle thread tension on the right.

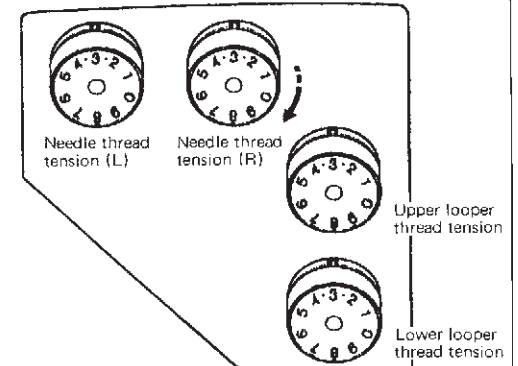


## Thread Tension (4 threads) (continued)

Adjusting the thread tension may be required depending on the type of fabric and thread being used.

### Correct Tension

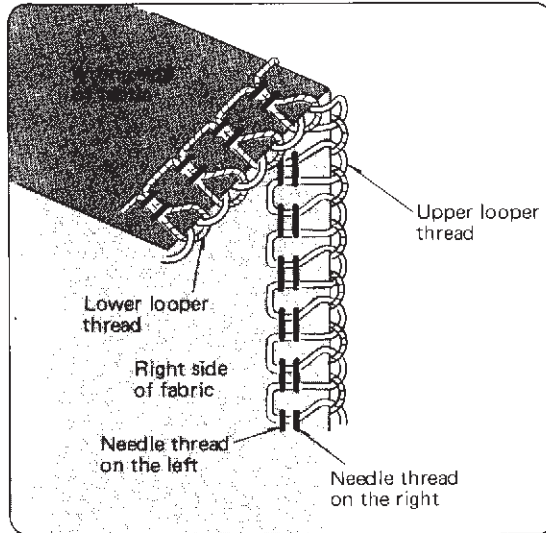


### Thread Tension Dial

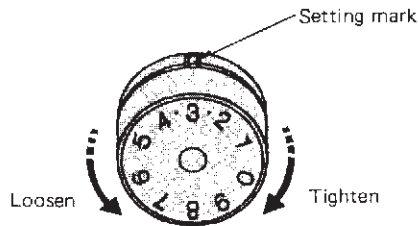


### Thread Tension Adjustment

\* Set all four thread tension dials at "3". Then sew, and check the thread tensions.


### Wrong Tension

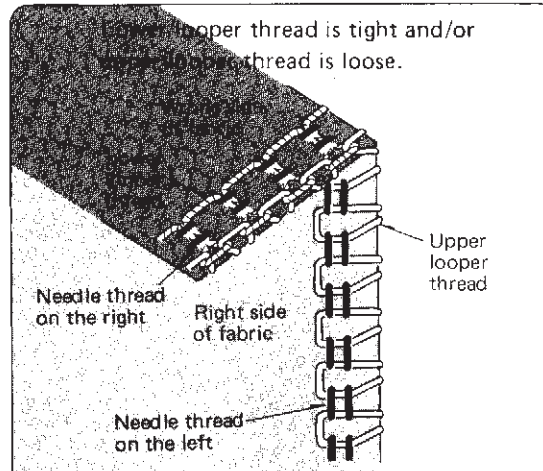


Loosen lower looper thread tension and/or tighten upper looper thread tension.

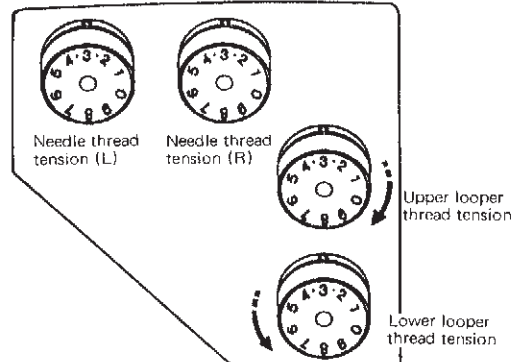

### Wrong Tension

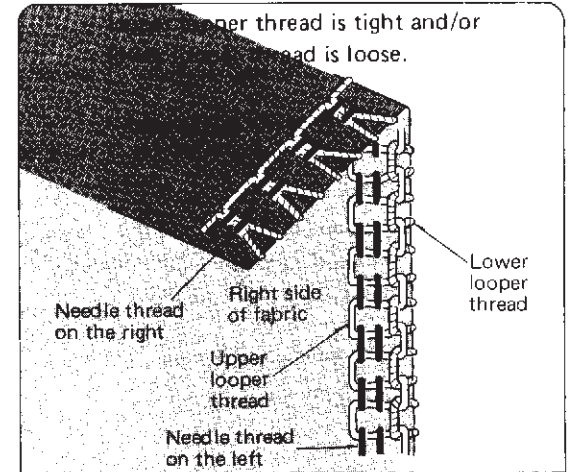


Loosen upper looper thread tension and/or tighten lower looper thread tension.

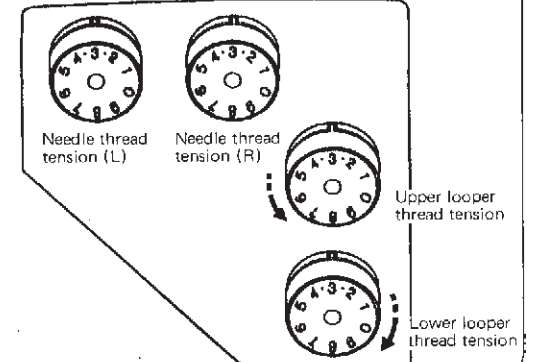

## Adjustment of Cutting Width





When cutting width is too narrow or too wide against seam width, adjust it as follows.

- ① Turn off the power switch and unplug the machine.
- ② Open the looper and side covers.
- ③ Set the upper knife to down position (refer to page 26).
- ④ Turn the cutting width adjusting dial to get desired position of lower knife.
  - (A) When cutting width is too narrow.  
Turn cutting width adjusting dial clock-wise.  
Lower knife will move to right.
  - (B) When cutting width is too wide.  
Turn the cutting width adjusting dial counter-clock-wise.  
Lower knife will move to left.
- ⑤ Set the upper knife to up position.
- ⑥ Close the looper and side covers.

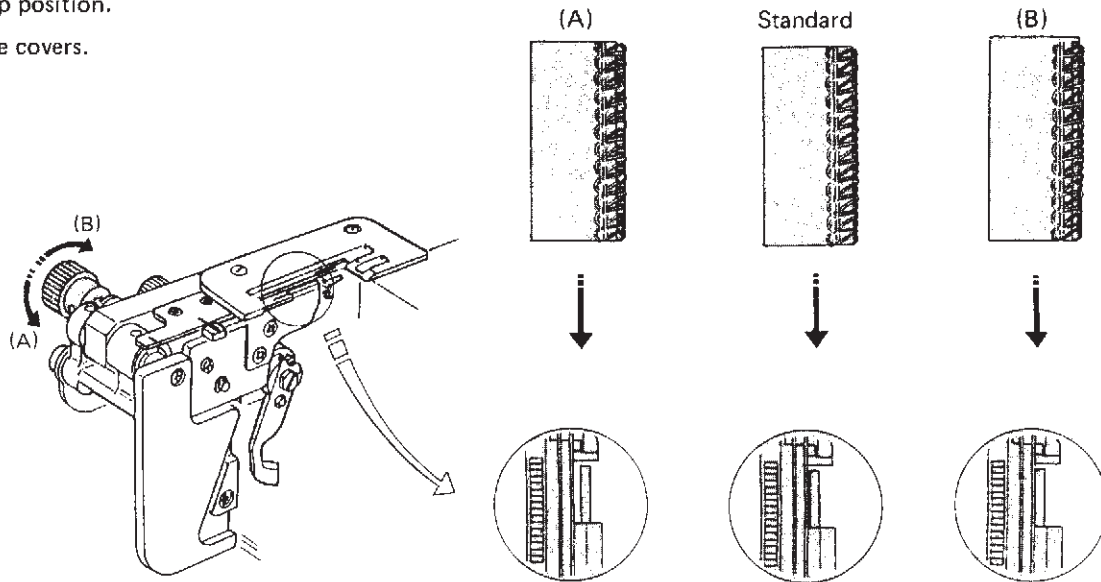




## Thread and Needle Chart

Type of Fabric		Type of Thread 	Needle 	Stitch Length 	Differential Feed Ratio (model 534D) 
Light weight	Organdy, Georgette, Lawn, Crepe de chine, Lining.	Cotton : No. 80 ~ 100 Silk : No. 80 ~ 100 Synthetic : No. 80 ~ 100	HA-1 SP No. 11	2.0 ~ 3.0 mm	0.7 ~ 1.0
Medium weight	Cotton, Linen, Satin, Ordinary fabric.	Cotton : No. 60 ~ 100 Silk : No. 50 ~ 100 Synthetic : No. 60 ~ 100	HA-1 SP No. 11 ~ 14	2.5 ~ 3.5 mm	1.0
Heavy weight	Tweed, Coating, Denim, Doeskin, Thick fabric.	Cotton : No. 50 ~ 60 Silk : No. 50 ~ 60 Synthetic : No. 50 ~ 60	HA-1 SP No. 14	3.0 ~ 5.0 mm	1.0
Knits	Knitted fabric	Cotton : No. 60 ~ 80 Synthetic : No. 60 ~ 90 Woolly nylon (For looper thread) Woolly polyester (For looper thread)	HA-1 SP No. 11 ~ 14	2.5 ~ 3.5 mm	1.0 ~ 2.0

\* Refer to page 24 for adjusting the stitch length and the differential feed ratio.


## Threading the Machine (3 threads)

### Using the Needle on the Right Only (for regular three-thread serging)

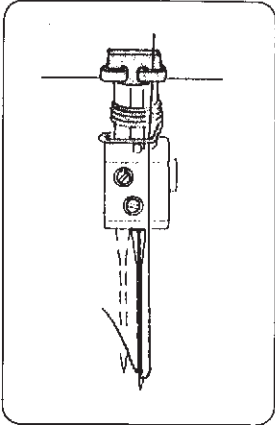

Disconnect the machine from the power supply. Remove the needle and the thread on the left. Then tighten the needle clamp screw on the left slightly to avoid losing the screw.

### Using the Needle on the Left Only (for wide three-thread serging)

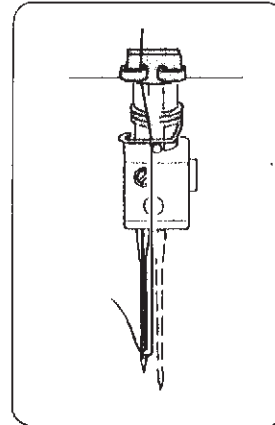

Remove the needle and the thread on the right. Then tighten the needle clamp screw on the right slightly to avoid losing the screw.

### To change to the other needle in three-thread serging


Loosen both needle clamp screws and remove the needle. Insert the needle and tighten the needle clamp screw for the needle to be used while pushing the needle up as far as it will go. Then tighten the needle clamp screw on the other side slightly to prevent the screw from dropping.

# Thread Tension (3 threads)

## Thread Tension Adjustment


\* Set all three thread tension dials at "3". Then sew, and check the thread tensions.

### Correct Tension

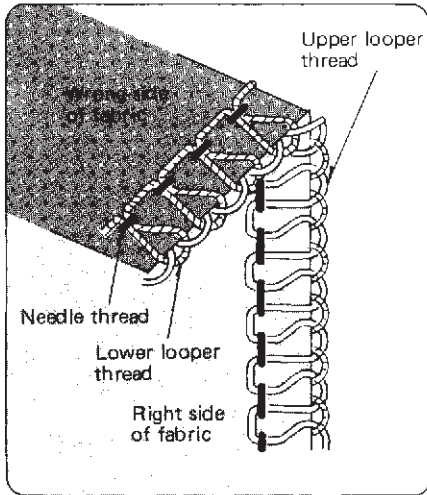


Adjusting the thread tension may be required depending on the type of fabric and thread being used.


### Wrong Tension

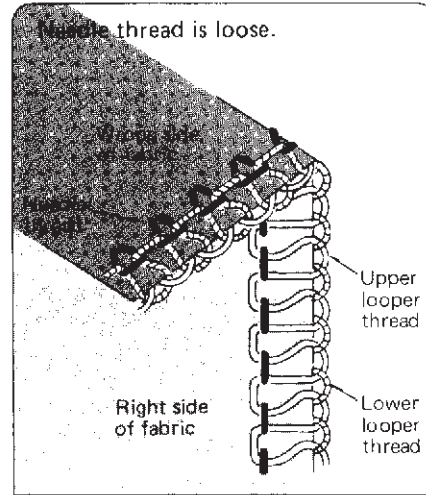


Tighten needle thread tension.

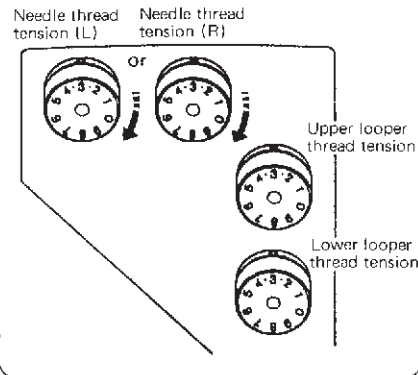


### Wrong Tension

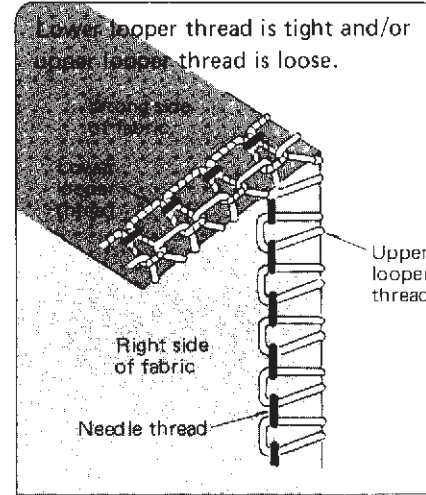


Loosen lower looper thread tension and/or tighten upper looper thread tension.

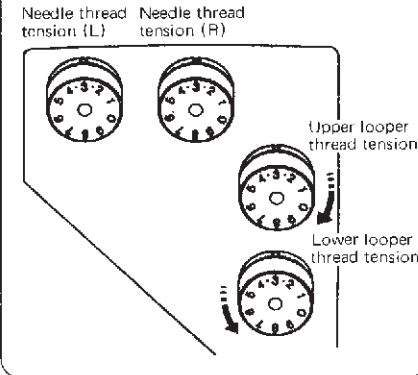


### Wrong Tension

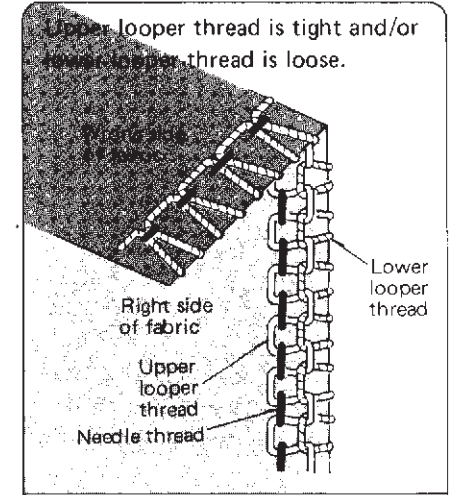


Loosen upper looper thread tension and/or tighten lower looper thread tension.

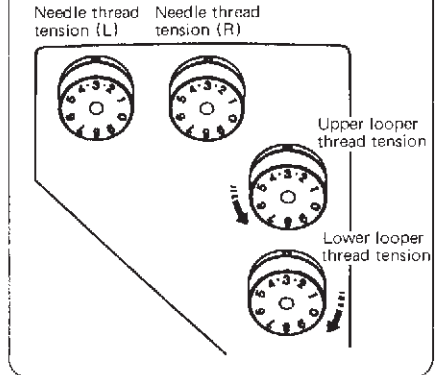

### Thread Tension Dial

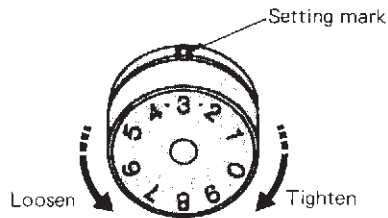

## Adjustment of Stitch Length

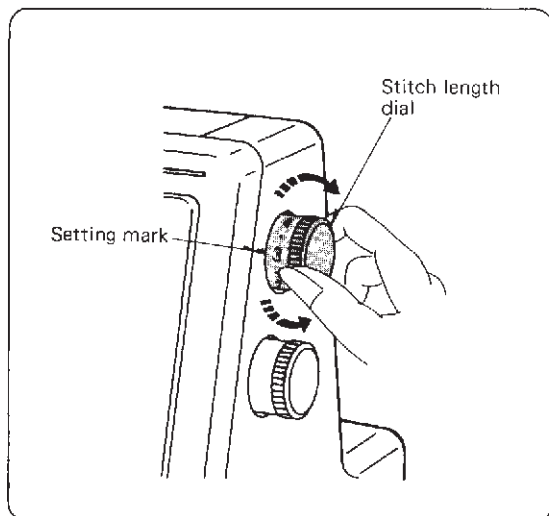


Turn the stitch length dial until the desired stitch length appears in the indicating window.

The larger the number, the longer the stitch.

The stitch length can be adjusted from 1 to 5 mm.

Position "R" is for rolled and narrow hemmings.

## Adjustment of Differential Feed Ratio

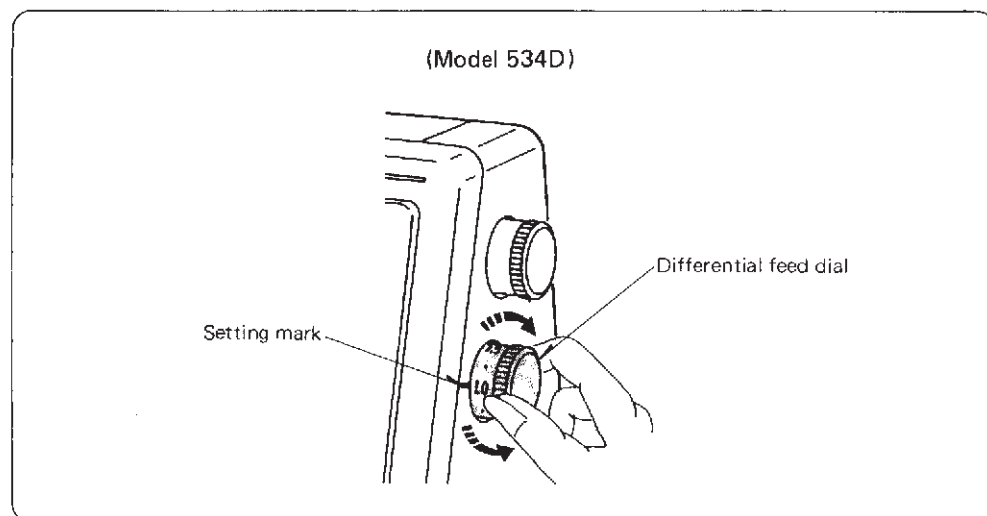


The differential feed ratio can be altered by turning the dial. The number in the window indicates the ratio between the main and the sub feed motion.


1.0 indicates the neutral position.

### How to Adjust

- If the sewn fabric is stretched, turn the dial counter-clockwise (toward 2.0).




- If the sewn fabric is shrunk, turn the dial clockwise (toward 0.7).




\* Maximum differential feed ratio, 2.0, is effective in the range of stitch length dial at 1 to 3.3. When the stitch length dial is set between 3.3 and 5, the maximum differential feed ratio will automatically be set between 2.0 and 1.3.

## Changing Needle

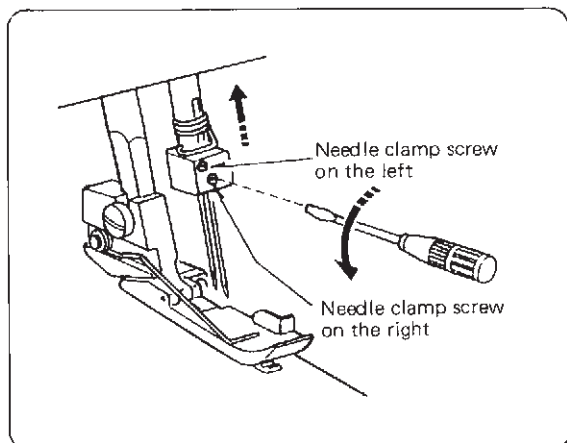

- 1 Disconnect the machine from the power supply. Raise the needle to its highest position. Then loosen the needle clamp screw for the needle you are going to remove.

Refer to page 22 for changing the needle for three-thread serging.

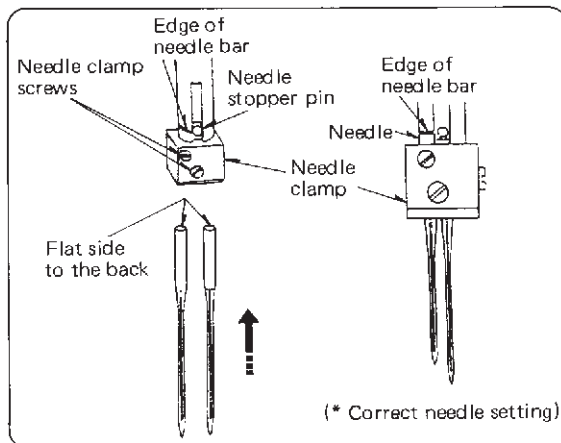


To Attach the needle on the right

Insert new needle into the needle clamp with the flat side to the back until the top of needle touches the stopper pin, then tighten the needle clamp screw on the right.

To attach the needle on the left


Insert new needle into the needle clamp with the flat side to the back until the top of needle touches the edge of needle bar, then tighten the needle clamp screw on the left.

\* When the needles are set correctly, the left needle is higher than the right one.



\* Do not use any needle which is bent or blunt.

## Adjustment of Foot Pressure

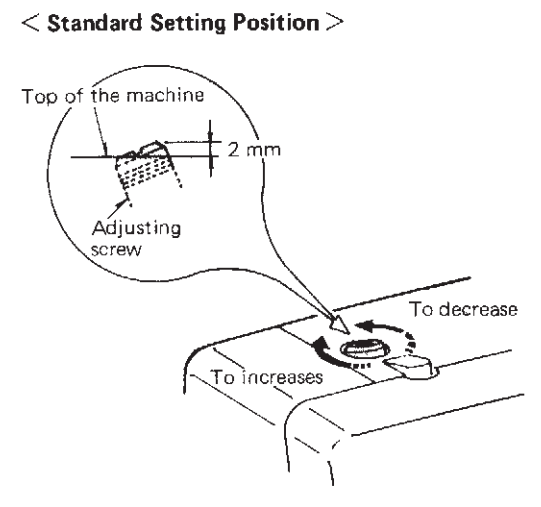


It is not necessary to adjust the pressure for normal sewing.

When you sew heavy or lightweight fabrics, turn the adjusting screw to:

- clockwise for heavyweight fabric.
- counter-clockwise for lightweight fabric.


\* For normal sewing, set the adjusting screw so that it positions above the top of the machine by 2 mm. See illustration.

## Removing the Presser Foot

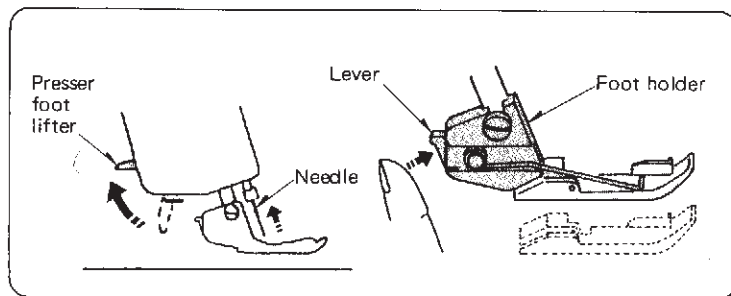


- 1 Raise the needle and presser foot.
- 2 Press the lever located on the back of the foot holder. The presser foot will drop off.

## To Deactivate the Upper Knife

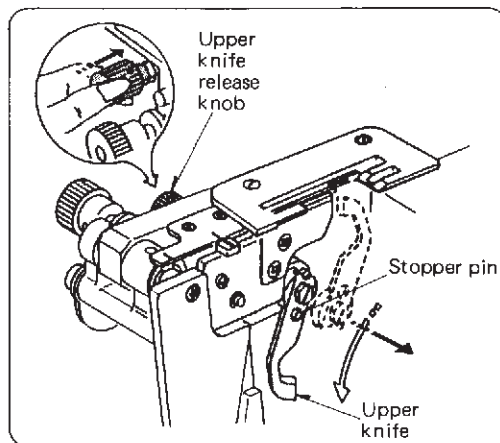


- 1 Disconnect the machine from the power supply.
- 2 Open the looper and side covers.
- 3 Turn the upper knife release knob toward you while pushing it to the right, then guide the hole on upper knife to the pin to lock the upper knife in down position.
- 4 Close the looper and side covers.

## To Activate the Upper Knife

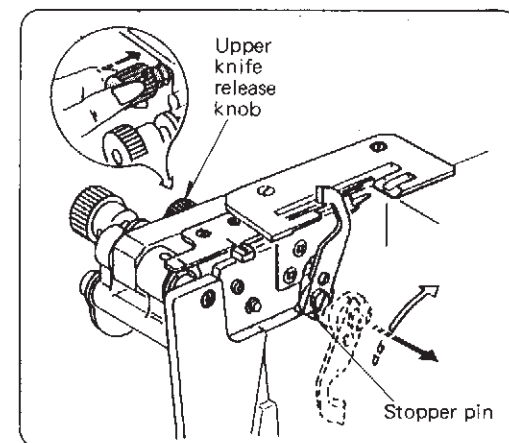



- 1 Disconnect the machine from the power supply.
- 2 Open the looper and side covers.
- 3 Turn the upper knife release knob away from you while pushing it to the right, then guide the groove on upper knife to the pin to lock upper knife in the up position.
- 4 Close the looper and side covers.

## Attaching the Presser Foot

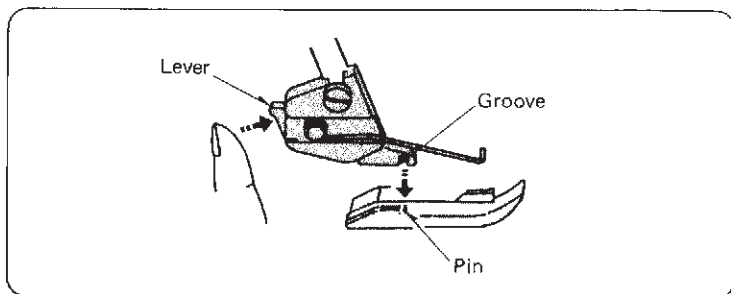

Place the presser foot so that the pin on the foot lies just under the groove of the foot holder. Lower the foot holder and push the lever to lock the foot in place. Raise the presser foot lifter to check that the presser foot is secure.

## Adjustment of Needle Plate Setting Knob (Changing to Standard Serging or Rolled Hemming)

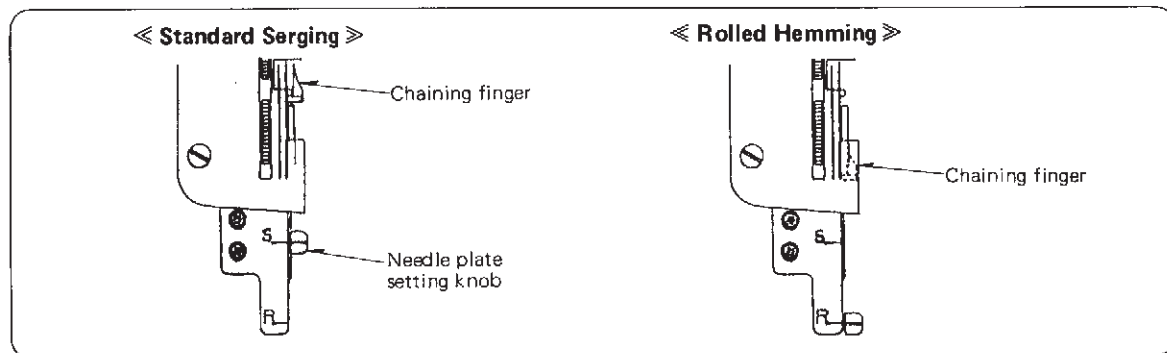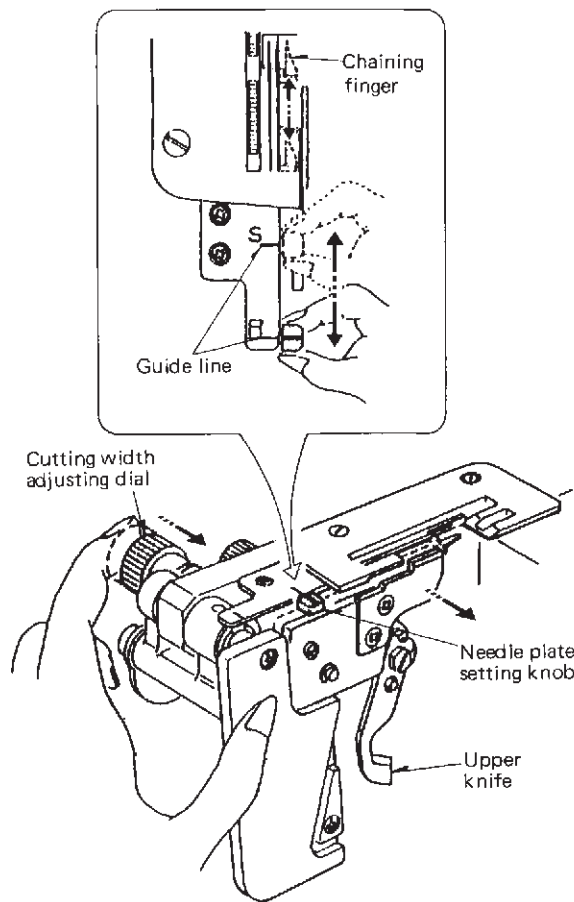











- ① Turn off the power switch and unplug the machine.
- ② Open the looper and side covers.
- ③ Deactivate the upper knife. (Refer to page 26.)
- ④ Push the cutting width adjusting dial to the right as far as it will go, then, move the needle plate setting knob to the guide line of S (for Standard Serging) or R (for Rolled Hemming). Release the cutting width adjusting dial to the left gently.
- ⑤ Set the upper knife to up position.
- ⑥ Close the looper and side covers.

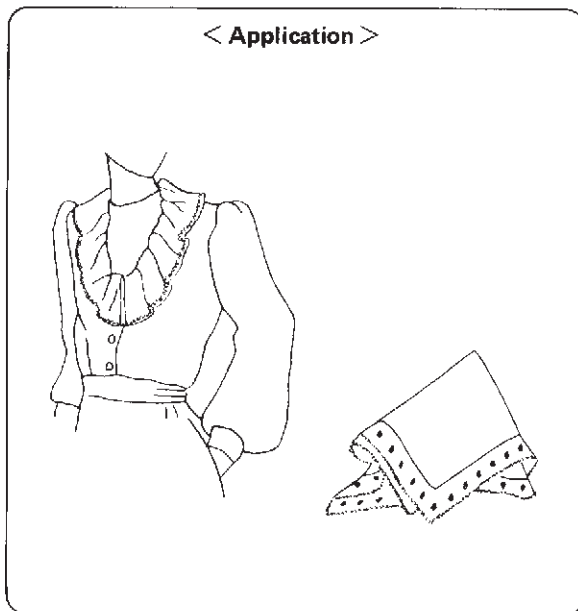

# ROLLED HEMMING, PICOT EDGING AND NARROW HEMMING







## Machine Setting



	Rolled Hemming	Picot Edging	Narrow Hemming
Stitch Length	 (R)	 (3 ~ 4)	 (R)
Differential Feed Ratio (model 534D)	 1.0	 1.0	 1.0
Needle	Remove the left needle.		
Needle Plate Setting Knob	 (R)	 (R)	 (R)

## Thread, Fabric and Range of the Tension Dial


The setting of tension dials may vary depending on the type and thickness of fabric and thread being sewn.

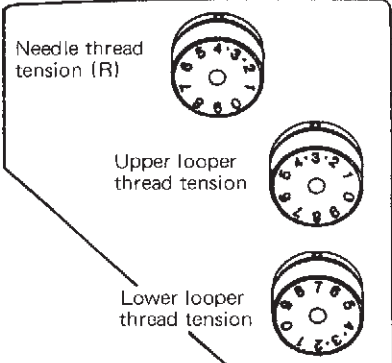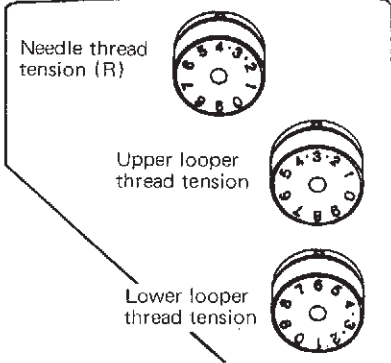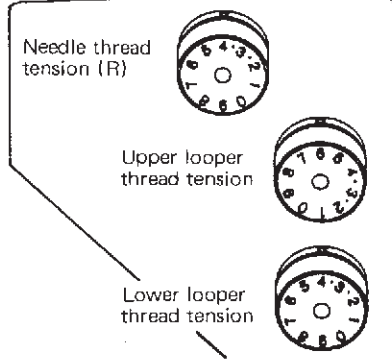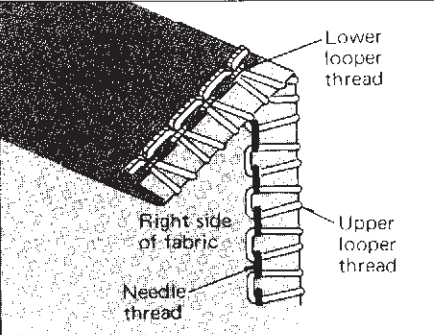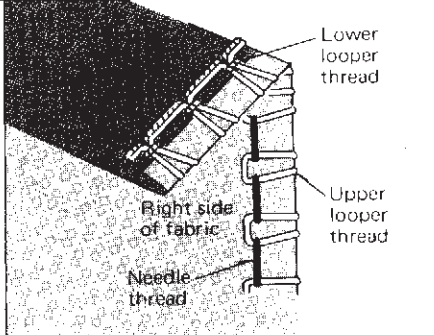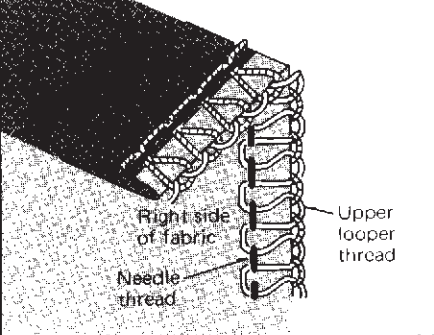Fabric		Rolled Hemming	Picot Edging	Narrow Hemming
	Needle thread	Long fiber polyester thread No. 80 ~ 100		
	Upper and lower looper threads	Woolly nylon, Woolly polyester	Synthetic : No. 60 ~ 100 Silk : No. 50 ~ 100	Woolly nylon, Woolly polyester
	Needle	HA-1 SP No. 11		
Lightweight fabric such as organdy, crepe de chine, lawn and georgette	Standard setting of tension dials			
	Correct thread tension			

## Adjusting Thread Tension


1. Set the tension dial as shown on page 29.
2. Sew and check the tensions.

– For better result –

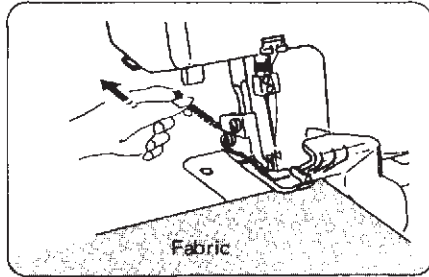

### Rolled Hemming

Pull the end of thread chain to the back lightly in the beginning and end of sewing.

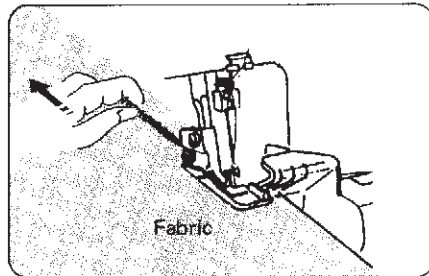

### Picot Edging

Pull the fabric lightly to the back while sewing.

## How to Adjust the Thread Tension


- For Rolled Hemming and Picot Edging

<p>Needle thread is loose.</p>	<p>Upper looper thread is loose.</p>	<p>Upper looper thread is loose and/or lower looper thread is tight.</p>
<p>Tighten needle thread tension.</p>	<p>Tighten upper looper thread tension.</p>	<p>Tighten lower looper thread tension and/or loosen upper looper thread tension.</p>

- For Narrow Hemming

Refer to page 23 for the adjustment.

## DECORATIVE OVEREDGING




< Application >

- \* Refer to pages 18, 19, 23 for thread tension balance adjustment.
- \* For the best result, pull the thread chain to the back lightly at the beginning and end of sewing.


### Thread, Fabric, Range of the Tension and Machine Setting

Fabric	Thread	
Medium to Heavy Fabric	Needle threads	Synthetic : No. 60 ~ 80 Silk : No. 50 ~ 80
	Upper looper thread	Buttonhole twist Light weight wool yarn
	Lower looper thread	Synthetic : No. 60 ~ 80 Silk : No. 50 ~ 80

#### ★ Standard Setting

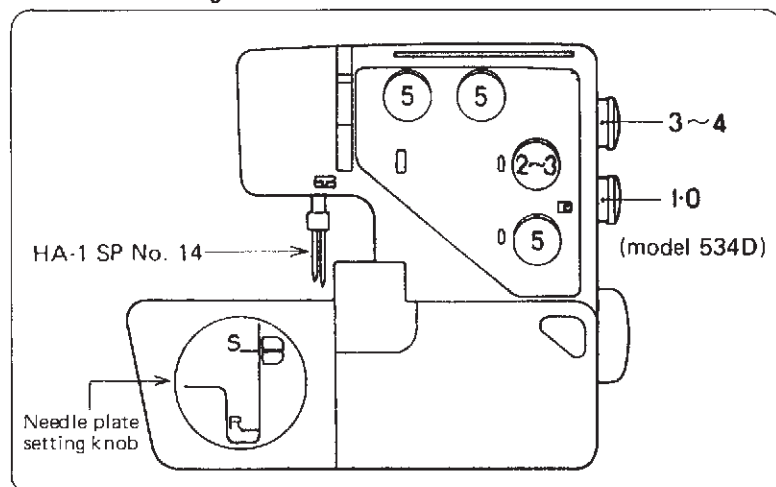

## GATHERING




< Application >

- \* Refer to pages 18, 19, 23 for thread tension balance adjustment.

### Thread, Fabric, Range of the Tension and Machine Setting


Fabric	Thread	
Light to Medium Woven Fabric	Needle threads	Synthetic : No. 60 ~ 80 Silk : No. 50 ~ 80
	Upper looper thread Lower looper thread	Synthetic : No. 60 ~ 80 Silk : No. 50 ~ 80

#### ★ Standard Setting

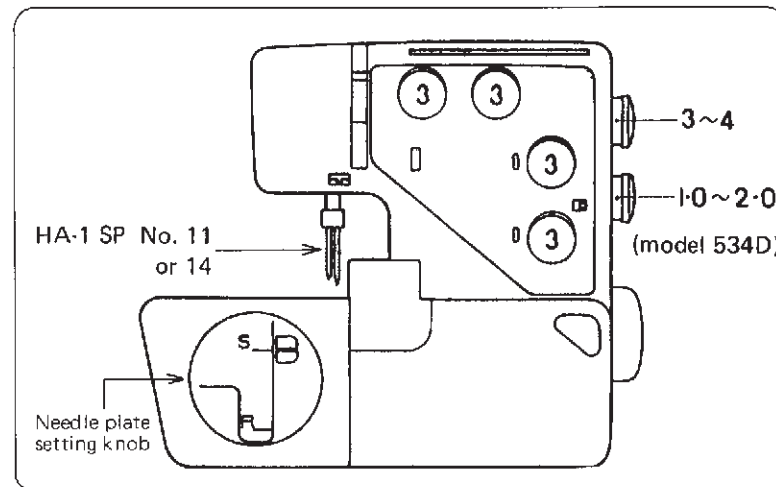

## PIN TUCKING

### < Application >




\* Refer to page 30.  
(Narrow Hemming) for thread tension balance adjustment.


### Fabric, Thread and Machine Setting

Fabric	Thread	
Light to Medium Fabric	Needle thread on the right	Synthetic : No. 60 ~ 80 Silk : No. 50 ~ 80
	Upper and lower looper threads	Synthetic : No. 60 ~ 100 Silk : No. 50 ~ 100


### ★ Standard Setting

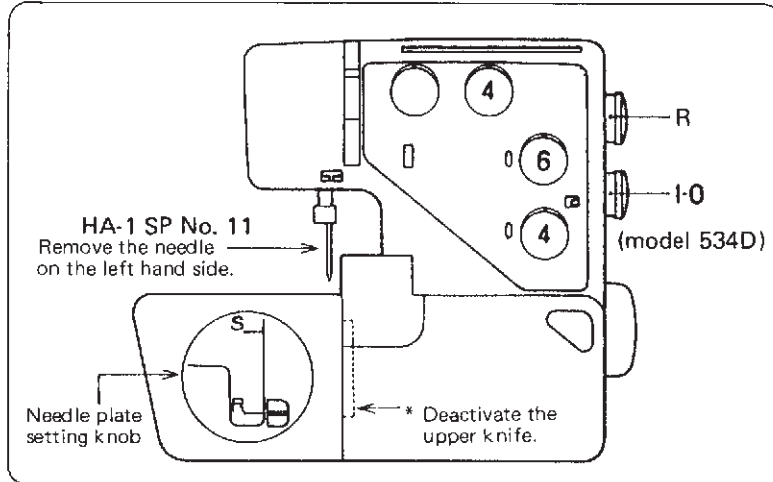

### Sewing

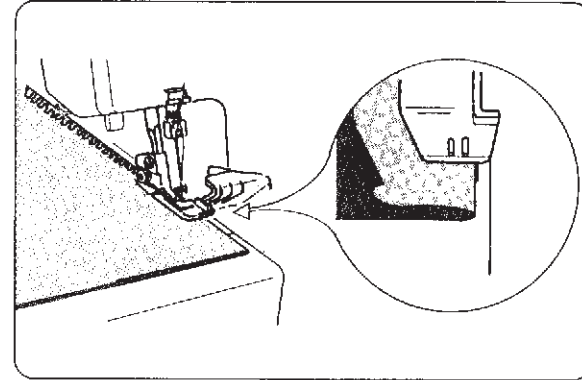


Remove the needle on the left hand side.  
Deactivate the upper knife. (Refer to page 26.)  
Sew the folded edge while guiding along the guide line.

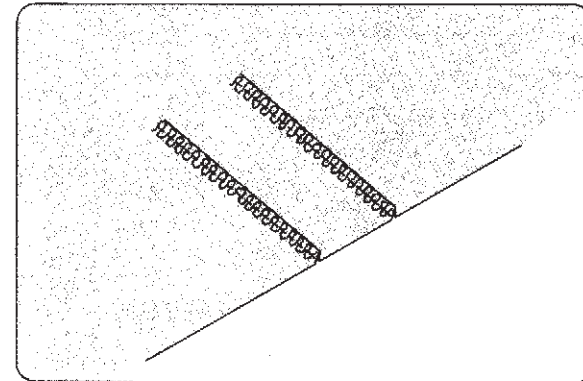

Press the pin tucks to one side.  
\* Activate the upper knife. (Refer to page 26.)


## CARE OF YOUR MACHINE

### Replacing the Upper Knife

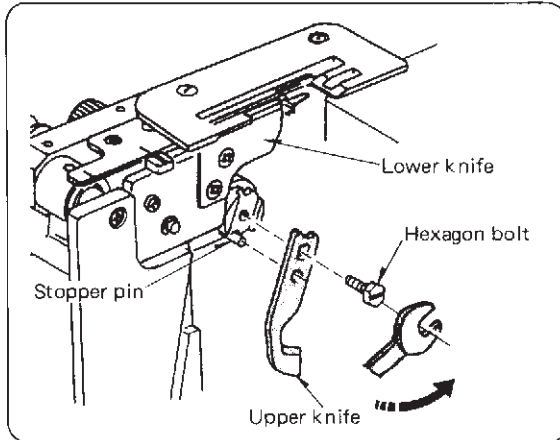

#### To Remove:


- ① Disconnect the machine from the power supply.
- ② Open the looper and side covers.
- ③ Deactivate the upper knife.  
(Refer to page 26.)
- ④ Remove the hexagon bolt, and remove the upper knife.

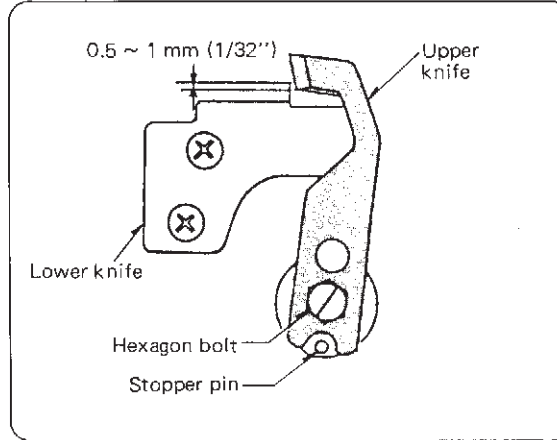

#### To Attach:

- ① Insert new upper knife into the groove of knife holder and stopper pin, then tighten the hexagon bolt slightly.
- ② Turn the upper knife holder to cutting position.
- ③ Turn the balance wheel toward you until the upper knife comes to its lowest position. Loosen the hexagon bolt, and adjust the position of upper knife so that the edge of the upper knife overlaps 0.5 to 1 mm (1/32'') from the edge of lower knife as shown above. Then tighten the hexagon bolt firmly.
- ④ Close the looper and side covers.

### Cleaning Upper Knife Area

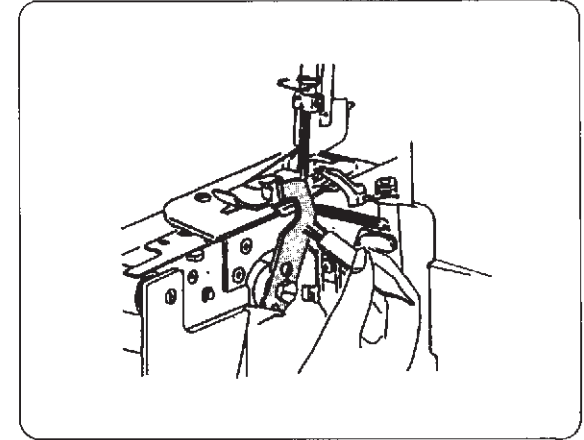


- ① Disconnect the machine from the power supply.
- ② Open the looper cover.  
Remove the waste chips to the front with a lint brush.


\* You may use vacuum cleaner to clean the upper knife area or feed dog.

\* The lower knife will last over one year in normal use. However, if you run over a pin or a hard object, it may be required to replace both upper and lower knives at the same time.

## Replacing the Light Bulb

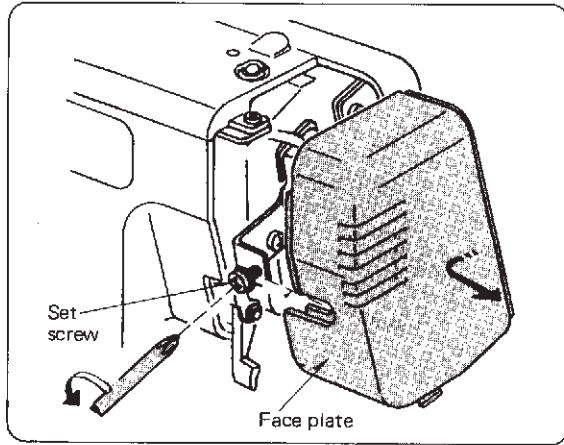

- 1 Disconnect the machine from the power supply.  
Loosen the face plate set screw, and remove the face plate.

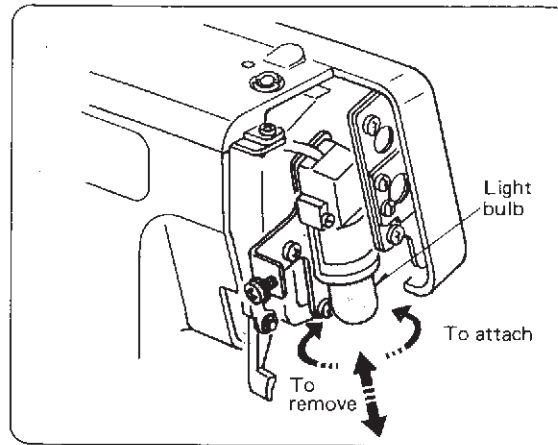

### 2 To Remove:

Bayonet type . . . . . Push and twist to the left.

### To put on:


Bayonet type . . . . . Push and twist to the right.

- 3 Attach the face plate, and tighten the face plate set screw.


### For your safety:

- \* The machine is designed to use a 15 WATT MAXIMUM LIGHT BULB.
- \* The light bulb will be HOT. Protect your fingers when you handle it.

## Cleaning the Feed Dog

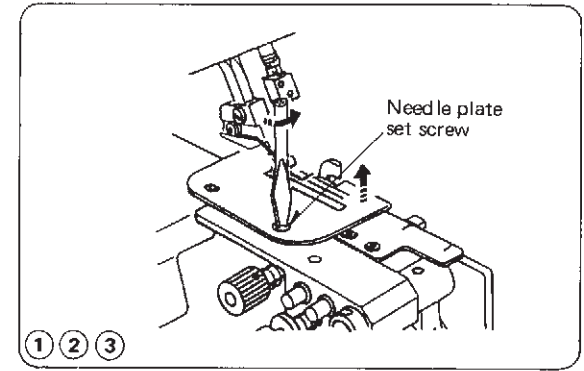


- 1 Open the looper and side covers.
- 2 Remove the needles and presser foot.
- 3 Remove the needle plate set screw, and remove the needle plate.

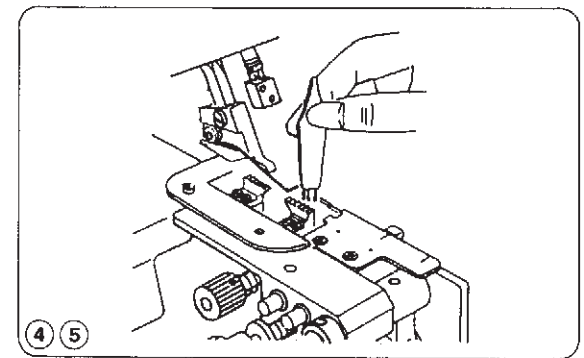

- 4 Push the lint around the feed dogs to the front by using a lint brush.
- 5 Attach needle plate, presser foot and needles. Close the looper and side covers.


## Oiling the Machine

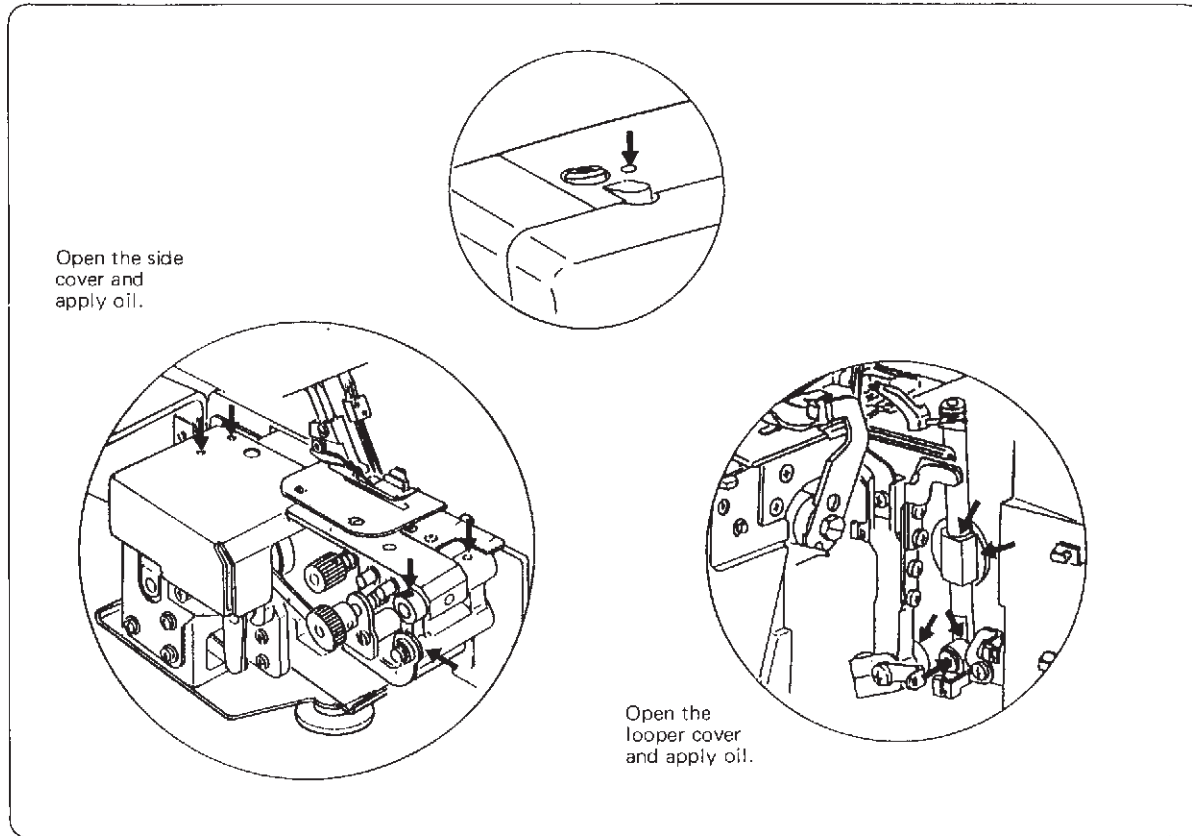

Apply a few drops of fine quality sewing machine oil to the parts indicated with arrows.

It is recommended to apply oil once a week in normal use, once in ten hours in continuous use.

## Carry the Machine

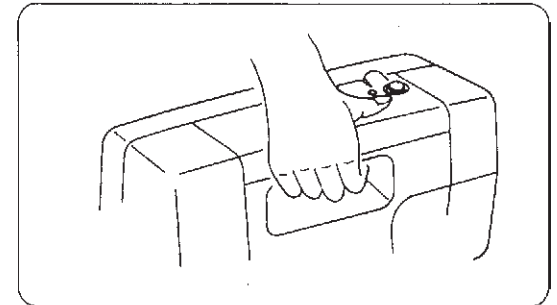

Put your fingers into the hole of the rear arm as showing above.



## Trouble Shooting

Condition	Cause	Reference
<b>The fabric is not being fed smoothly.</b>	<ol style="list-style-type: none"> <li>1. The feed dog is packed with lint.</li> <li>2. The presser foot has been raised.</li> </ol>	<p>See page 34. Lower the presser foot.</p>
<b>The needle breaks.</b>	<ol style="list-style-type: none"> <li>1. The needle is incorrectly inserted.</li> <li>2. The needle is bent or blunt.</li> <li>3. The fabric is forcedly pulled.</li> </ol>	<p>See page 25. See page 25. Pull the fabric lightly.</p>
<b>The thread breaks.</b>	<ol style="list-style-type: none"> <li>1. The machine is not correctly threaded.</li> <li>2. The needle or looper thread tension is too tight.</li> <li>3. The needle is incorrectly inserted.</li> <li>4. The needle is bent or blunt.</li> </ol>	<p>See pages 7 ~ 15 and 22. See pages 18 ~ 19 and 23. See page 25. See page 25.</p>
<b>Skipped stitches</b>	<ol style="list-style-type: none"> <li>1. The needle is bent or blunt.</li> <li>2. The machine is not correctly threaded.</li> <li>3. The needle is incorrectly inserted.</li> </ol>	<p>See page 25. See pages 7 ~ 15 and 22. See page 25.</p>
<b>The seam is not sewn neatly.</b>	<ol style="list-style-type: none"> <li>1. The needle and/or looper thread tensions are not correctly adjusted.</li> <li>2. The machine is not correctly threaded.</li> <li>3. The needle and/or the thread are not suitable for the fabric being sewn.</li> <li>4. The thread is not between the tension discs.</li> </ol>	<p>See pages 18 ~ 19 and 23. See pages 7 ~ 15 and 22. See pages 21, 29, 31 and 32. See pages 9, 10, 13 and 15.</p>
<b>Seam puckering.</b>	<ol style="list-style-type: none"> <li>1. The needle or looper thread tension is too tight.</li> <li>2. The machine is not correctly threaded.</li> <li>3. The differential feed dial is not correctly adjusted.</li> </ol>	<p>See pages 18, 19 and 23. See pages 7 ~ 15 and 22. See page 24.</p>
<b>The machine does not operate.</b>	<ol style="list-style-type: none"> <li>1. The machine has not been plugged in firmly.</li> <li>2. The power switch is turned off.</li> </ol>	<p>See page 4. See page 4.</p>
<b>The fabric is not cut neatly.</b>	<ol style="list-style-type: none"> <li>1. The position of the upper knife is not adjusted properly.</li> <li>2. The upper knife is dull.</li> </ol>	<p>See page 33. Replace the upper knife. (See page 33.)</p>