

Janome BOM

Block K / Month 11

You will need:

- **Precision Flying Geese & HST Ruler**
- **Precision Jelly Roll Ruler OR Precision Precuts Ruler**
- **¼" piecing foot (with or without guide) OR HP foot and plate system**
- **2.4 stitch length**
- **50wt. cotton thread in top and bobbin, neutral color or match background fabric**

Cut:

Background fabric:

- 4 - 2½" squares
- 10 - 2½" Side B triangle pairs from fabric strip folded in half

Cherry:

- 1 - 2½" square

Cut the following from each of Mint and Royal:

- 4 - 2½" Side A triangles


Rust:

- 4 - 2½" Side B triangles

Block assembly:

- Sew B fabric triangles together to create 4 - 2½" HSTs from Rust and background fabrics.
- Sew B triangles to the A (center) triangles to create the following 2½" x 4½" flying geese units:
 - 4 Royal A triangle / background fabric B triangles.
 - 4 Mint A triangle / background fabric B triangles.
- Arrange the HSTs, squares and flying geese units as shown in the diagram.
- Using a ¼" seam allowance, sew the flying geese units into sections as indicated.
- You will sew a partial seam of approximately 1" to join a Mint/background fabric flying geese unit to the center square before adding the other flying geese units to the section. Press the seams as shown. After adding the fourth flying geese unit, complete the partial seam.

- Join the sections together to construct the block.
- Use the Precision Precuts Ruler to square-up the block to 10½" x 10½" if necessary.

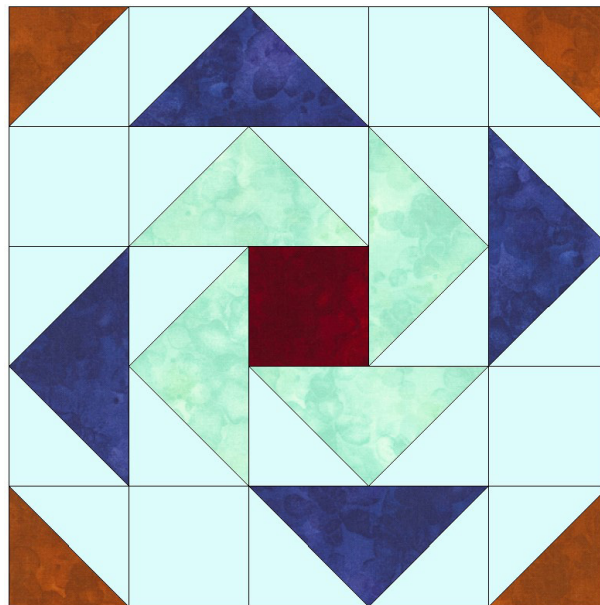

**Block size: 10" finished
(10½" unfinished).**

