

Risk a Wristlet

Melinda J Stephenson

Revised September 2018 – Anne Hein

Assemble your supplies:



Supply List:


- 2 pieces 5" x 8" for wristlet back and top half of wristlet front
- 1 piece 10" x 8" for bottom half of wristlet
- 1 piece 5" x 8" for lining
- 1-9" nylon zipper
- 1 piece 3" x 4" sewable plastic for credit card holder
- Hardware for strap – hook and split ring
- 1 piece 2" x 12" for strap
- 2 pieces of tear away stabilizer to fit your hoop

Prep pieces:

- Fold one 5" x 8" piece in half, press.
- Piece will be 2 ½" x 8".
- Fold 8" x 10" piece in half, press.
- Piece will be 5" x 8".



Make the strap

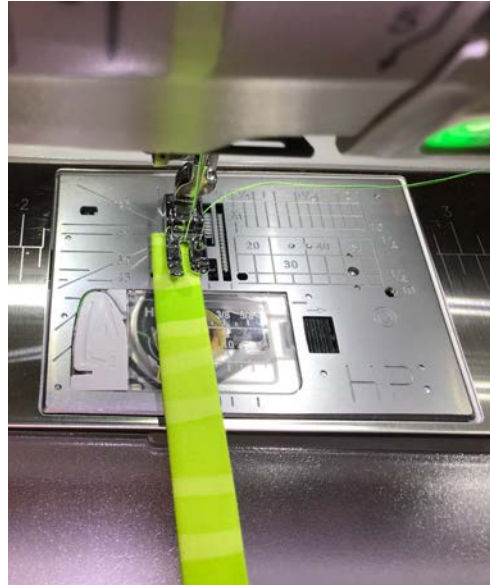

Fold strap in half,
press.

Fold edges to
middle, press again.

Fold again, press.
Stitch close to edge on
each side.

Cut off 2" for loop.

Complete the strap



Slide hook on strap. Place right sides together, stitch across to secure. Turn right side out.




Slide hook down close to seam, fold strap in half. Stitch across several times to secure hook.




Step 1:

- Hoop tear away stabilizer.
- Sew color 1, outline stitch.

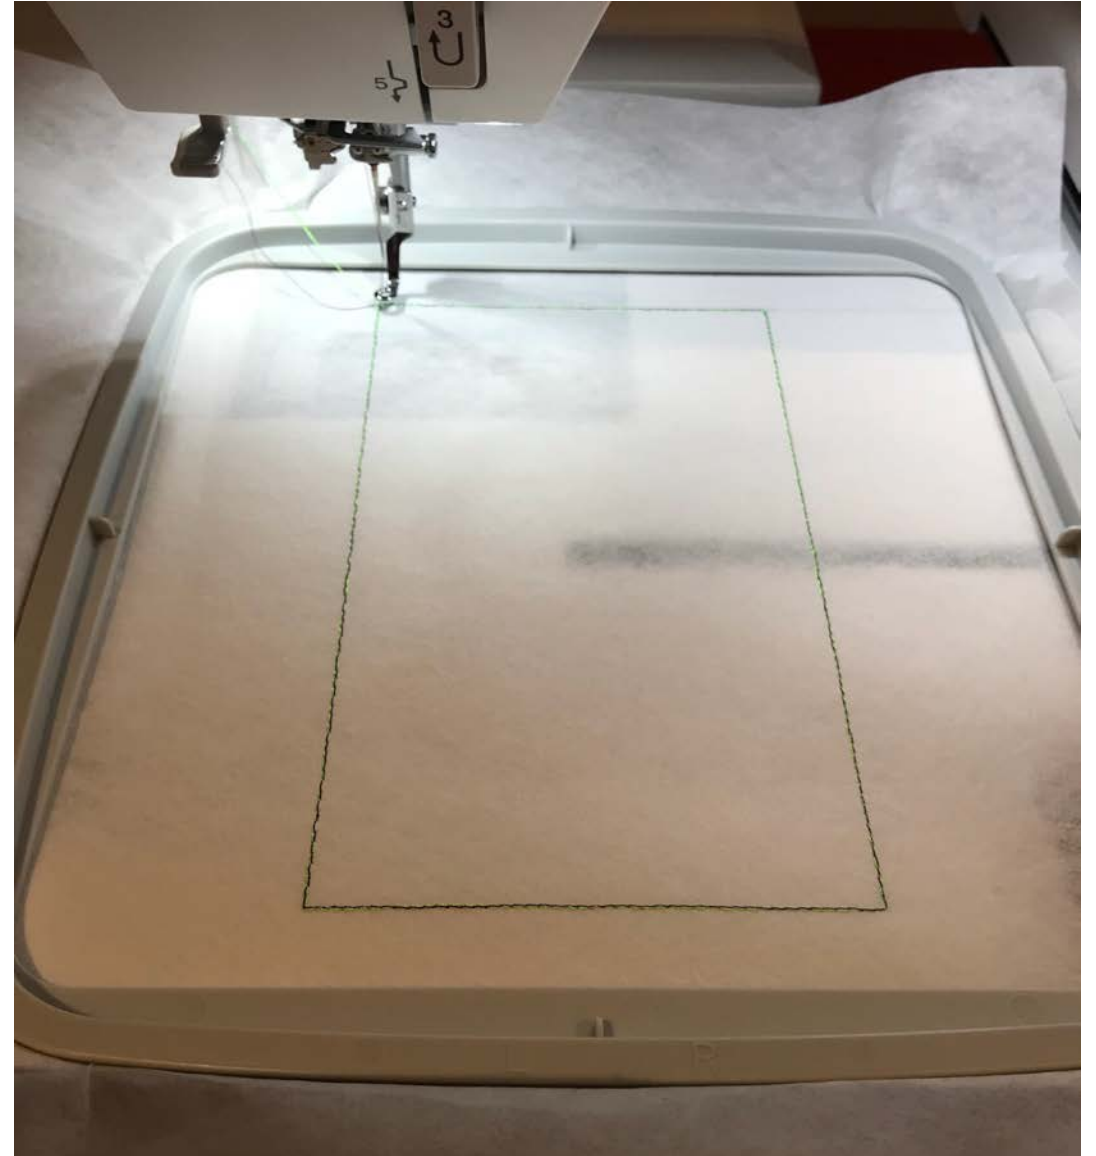


Step 2:

- Place lining over outline stitch.
- Stitch color 2, sew down for lining.

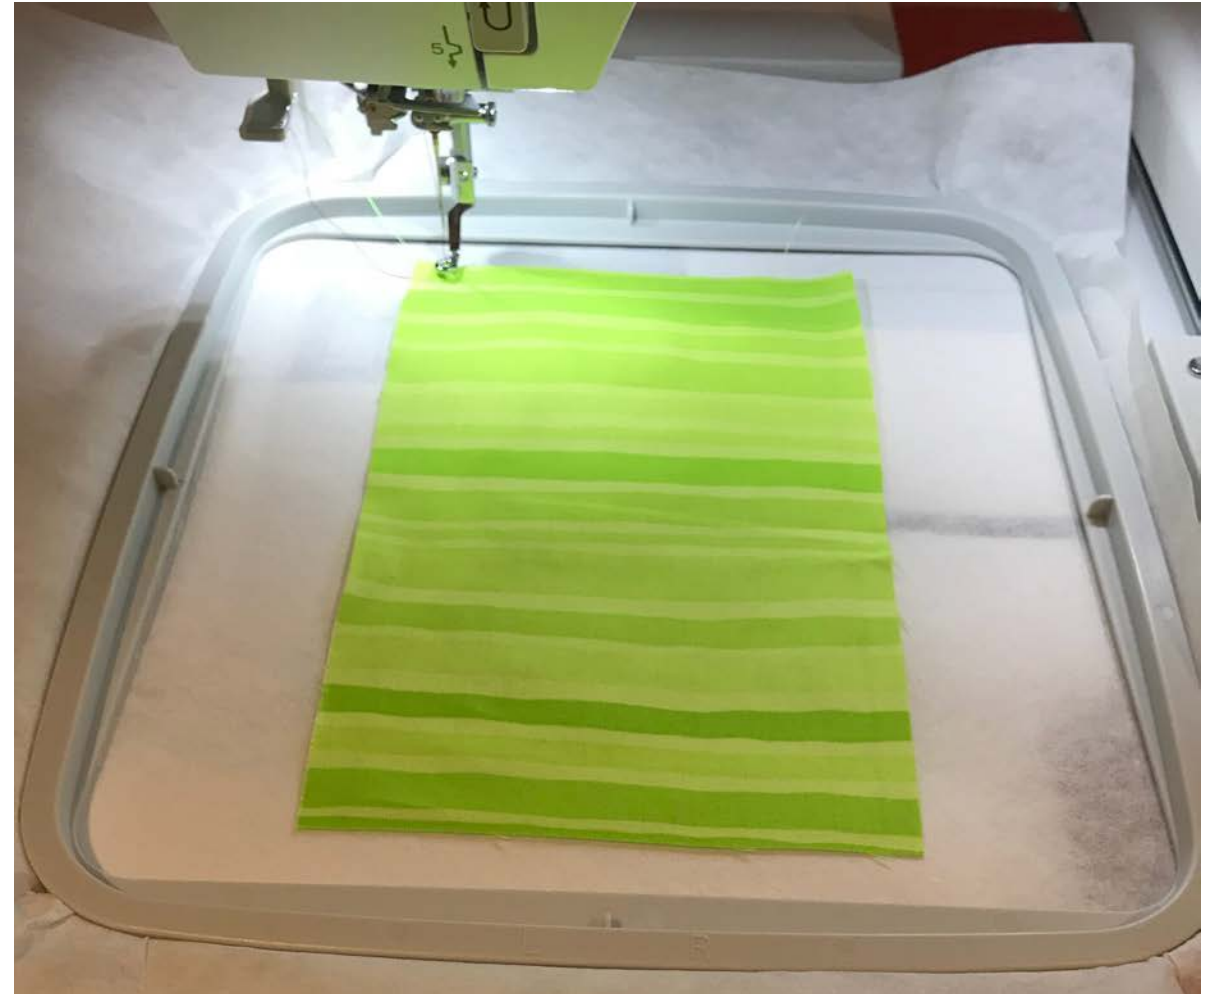

Step 3:

- Sew color 3, outline for plastic card holder.
- Place plastic over outline.
- Sew color 4, sew down stitch for plastic card holder.

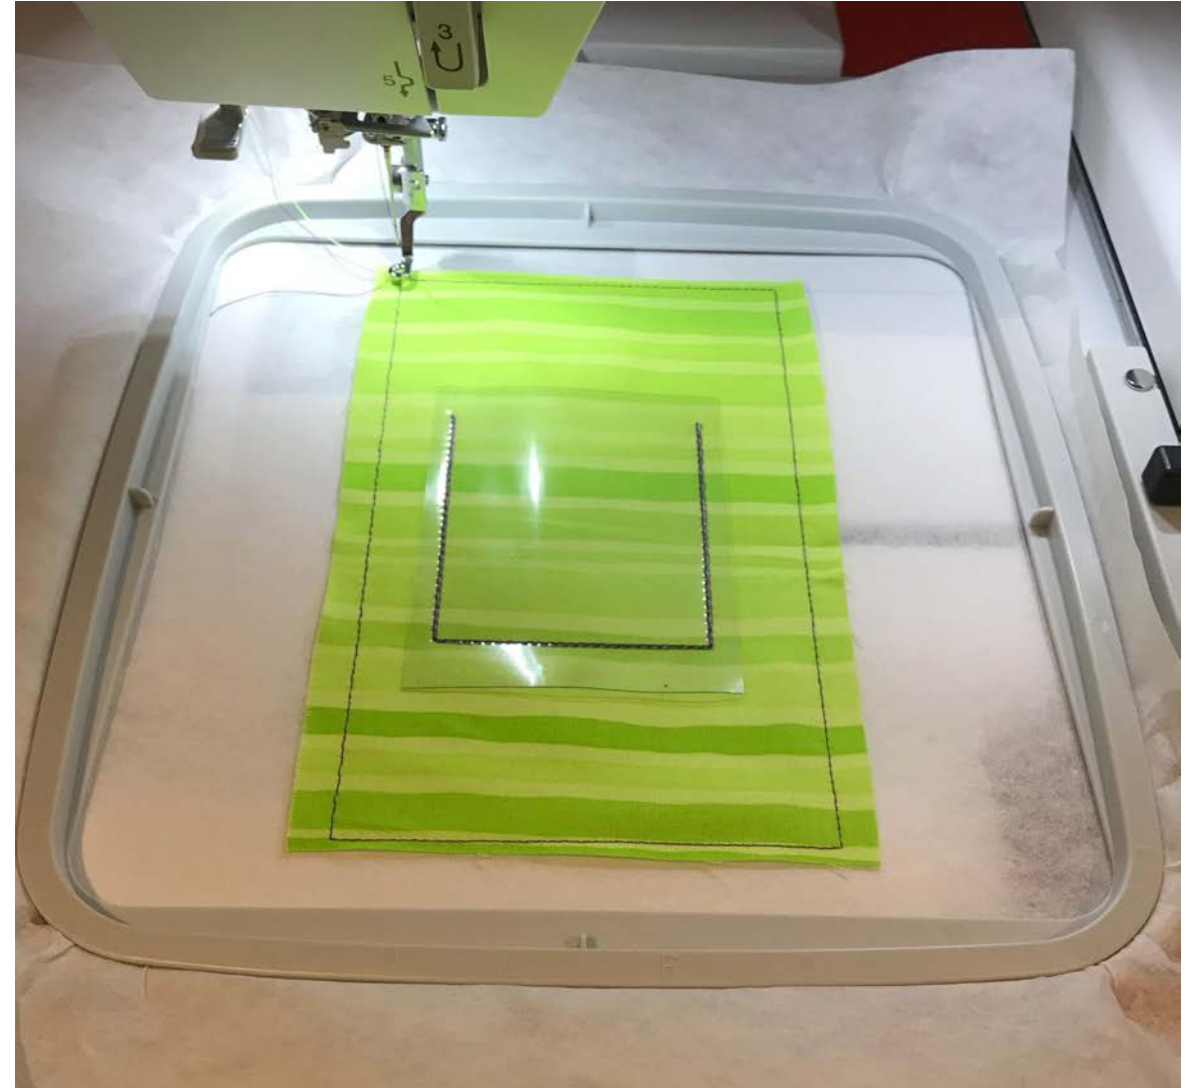


Step 4:

- Remove from hoop.
- Remove tear away stabilizer.




Step 5:

- Hoop new tear away stabilizer.
- Sew color #5, outline for wristlet front.
- Place zipper over placement box, be sure top tab and bottom stopper are outside stitch area.
- Place tab on left side of box.
- Tape sides of zipper.

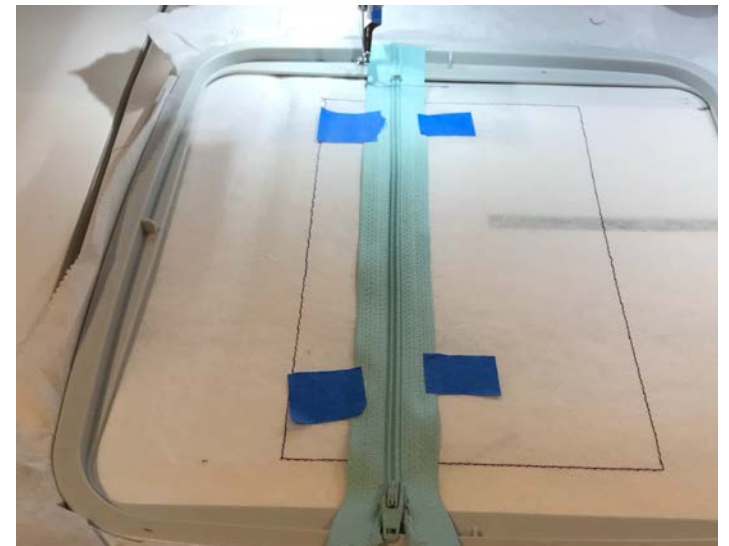

Step 6:

- Sew color 6, sew down for zipper.
- Be sure foot does not hit zipper tab or stopper.
- The goal is to keep zipper tab and stopper away from presser foot.

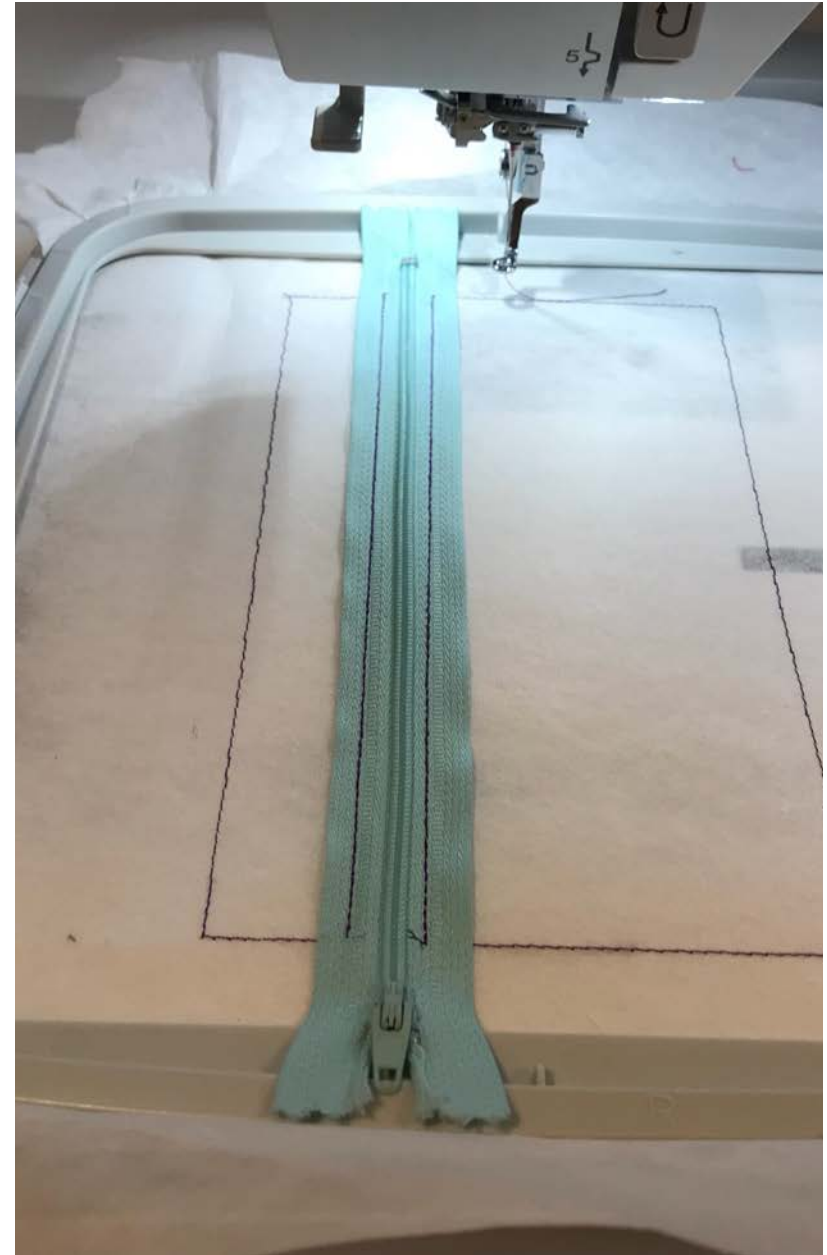

Step 7:

- Remove hoop, place top and bottom front along zipper.
- Keep fold of fabric close to zipper, have side edges even.
- Sew color 7.



Step 8:

- Attach wristlet loop: sew color 8, wristlet place marker.
- Tape loop over marker with raw edges of loop outside fabric.
- Sew color 9, wristlet sew down.
- **Important!! Open zipper ½ way**



Step 9:

- Place back fabric face down on top of front, be sure to line up with stitch out box from Step 5, **zipper must be open ½ way.**
- Place liner face up on top of back fabric, place tape over corners of plastic to keep presser foot from catching on plastic. Keep fabric in line with back fabric.
- Sew color 10, sew down line for wristlet.



Step 10:

- Remove tear away stabilizer, trim.
- Optional: use a zig zag or over edge stitch to finish edges.
- Turn right side out through zipper opening.



Complete!

