

How to Load Quilt on Quilt Maker Pro Frame

Created by: Kelley McKenzie, Janome Educator



Basic Instructions:

1. Lay backing fabric over top bar on front of frame with right side of fabric facing the floor.



2. The leader should be coming from under the bar to where the right side of the leader is showing (where you can read the words on the leader) and then line the center of the backing fabric with the center edge of the leader and pin it to it starting from the center and pinning out to the ends of the backing.



How to Load Quilt on Quilt Maker Pro Frame


3. Roll the backing fabric on the bar and smooth out any wrinkles as you go.




5. Line the top edge of the backing with the edge of the leader coming off the top bar.



4. Take the top of the backing fabric and bring it below the bottom bar on the backside of the frame and then weave it in-between the bottom and top back bars making it lay onto of the top bar.

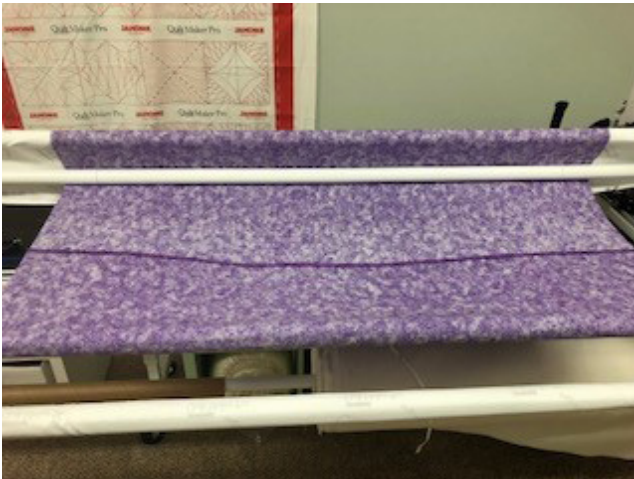

6. Attach the clamps to your backing to help hold it tight where no wrinkles can form.

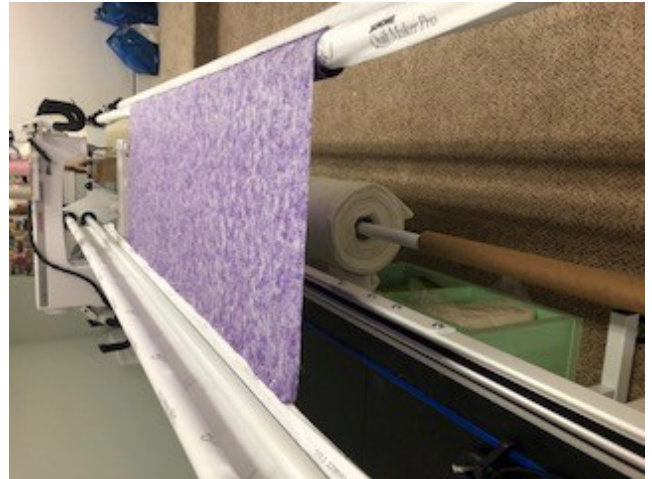

How to Load Quilt on Quilt Maker Pro Frame


7. Lay the batting on top of the backing.



8. Lay the quilt top on top of the batting. (if your desire is to float your top then you can stop on this step and baste the sides and top of the quilt down).



9. If you wish to pin the quilt top to the lower front bar then line the edge of the leader with the bottom edge of your quilt top.

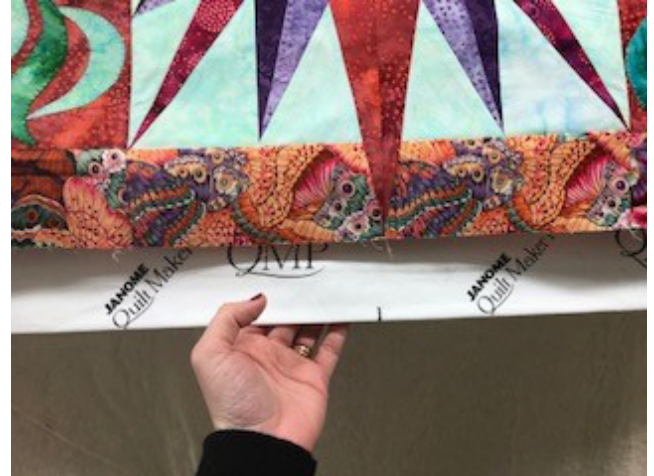

10. Roll the quilt top onto the bottom bar until you only have enough of the quilt top exposed to quilt a 10-12 inches section.

